







Trimless Recessed Track-El




Trimless Recessed Track



Slim Track




Standard Track







Slim Track

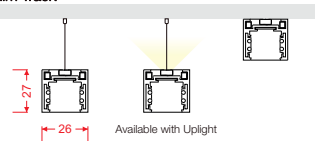


Standard Track

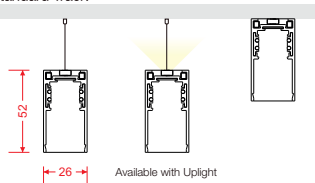

Trimless Recessed Track

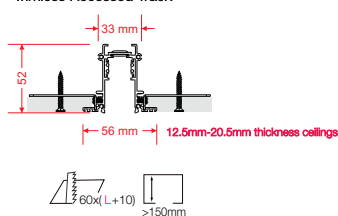

Trimless Recessed Track-EI



ML26-RS25-5W



ML26-RS40-16W



ML26-RS40-24W



ML26-RT55-10W



ML26-RS40-8W



ML6-RS40-12W



ML26-AL190-3W



ML26-AL190-7W



ML26-AL280-9W



ML26-AL280-13W



ML26-SA280-13W



ML26-GL280-7W
ML26-GL560-13W
ML26-GL840-19W
ML26-GL1120-26W



ML26-SG280-7W




ML26-VW280-7W
ML26-VW560-13W




ML26-PS40-12W




ML26-PS55-14W

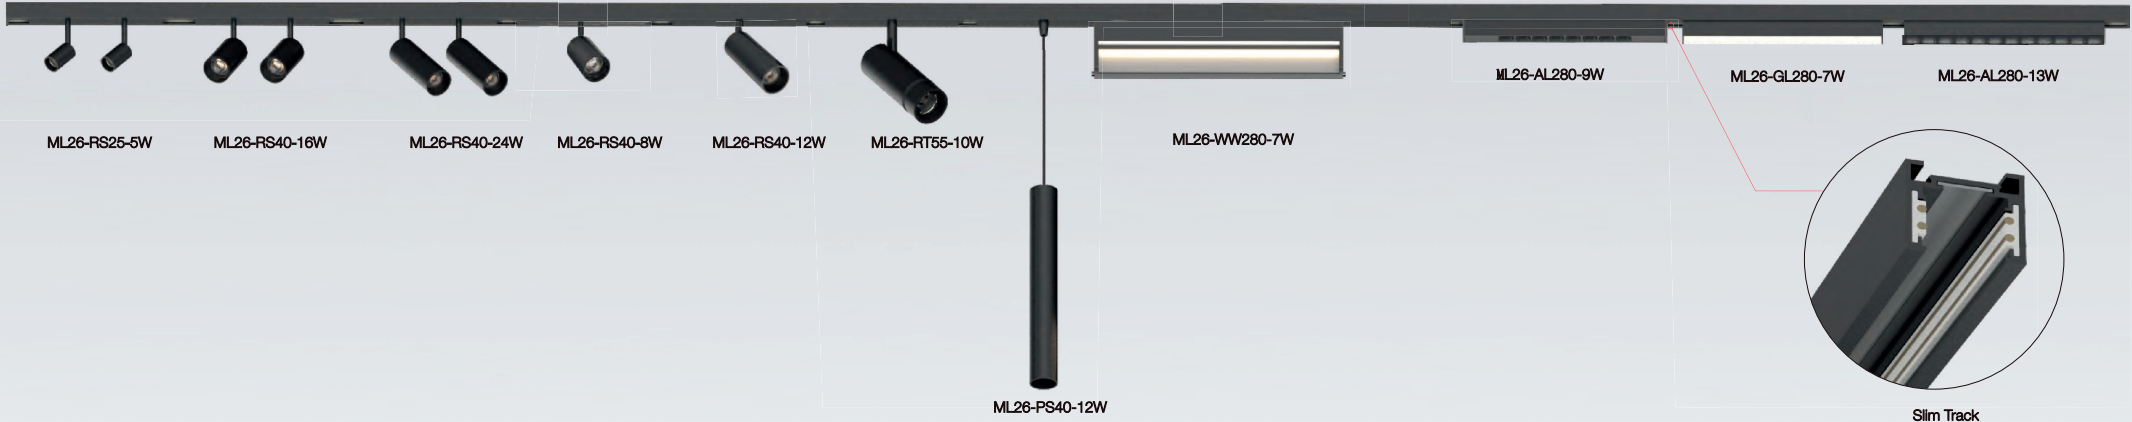




Slim Track

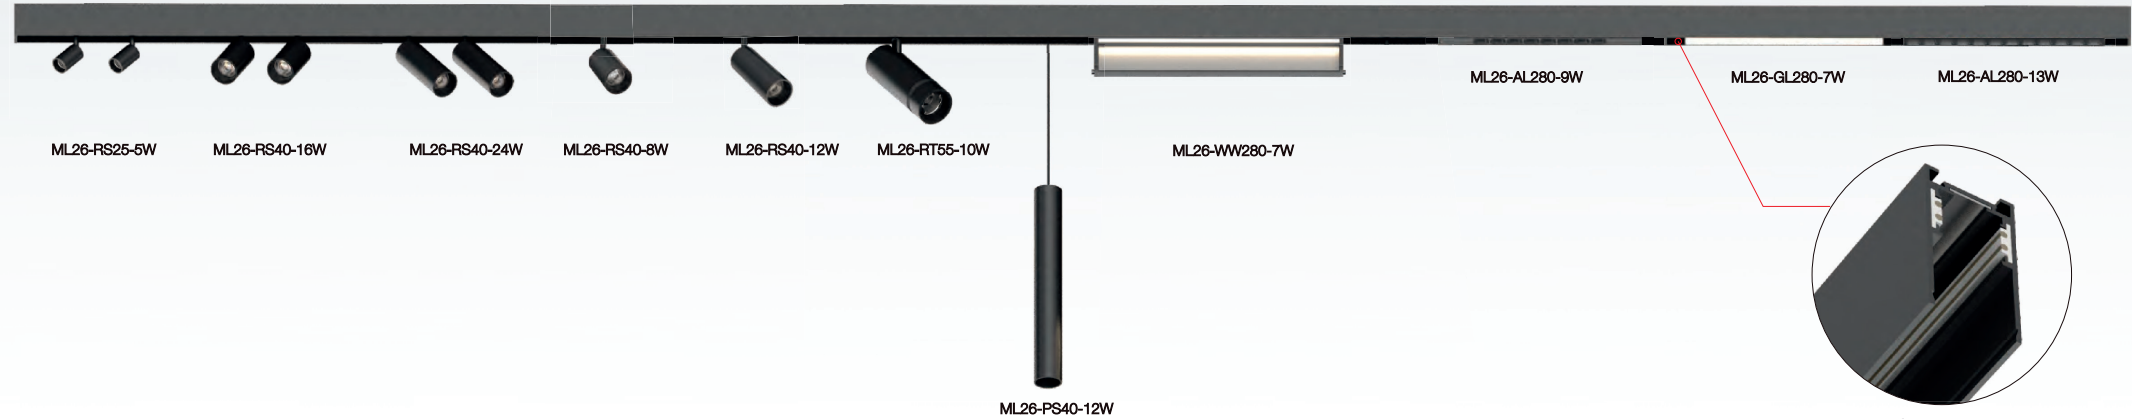


Standard Track


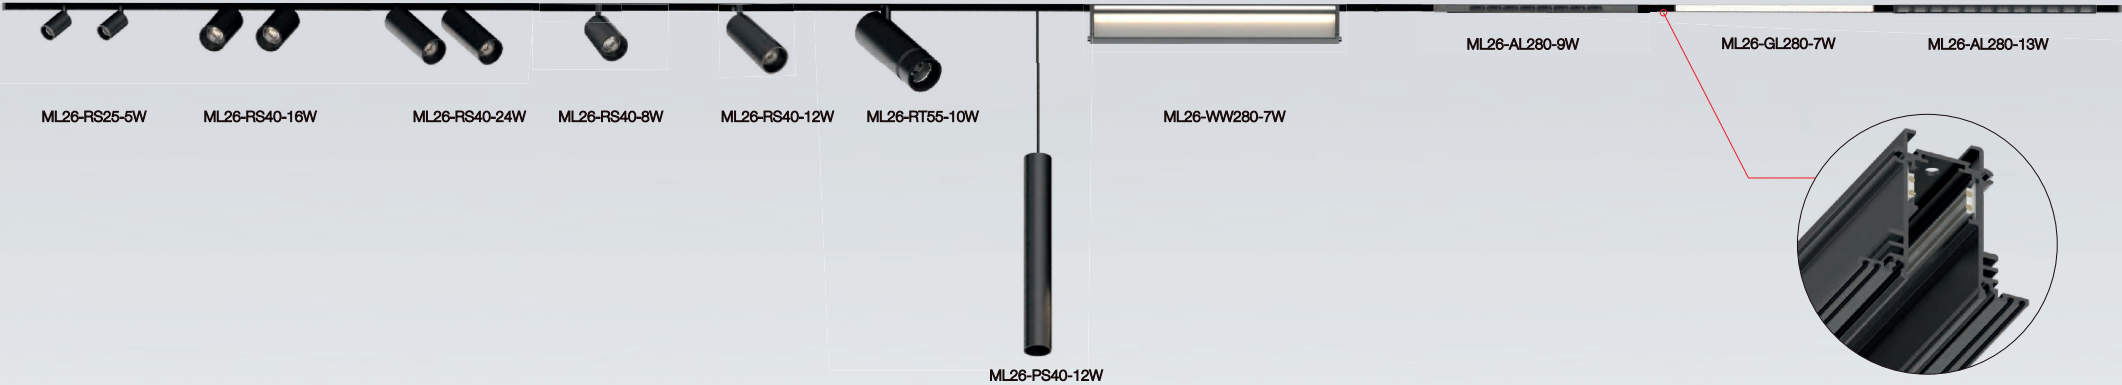


Trimless Recessed Track

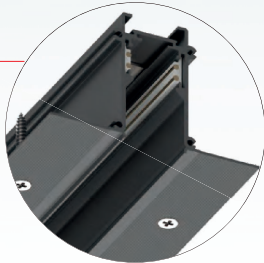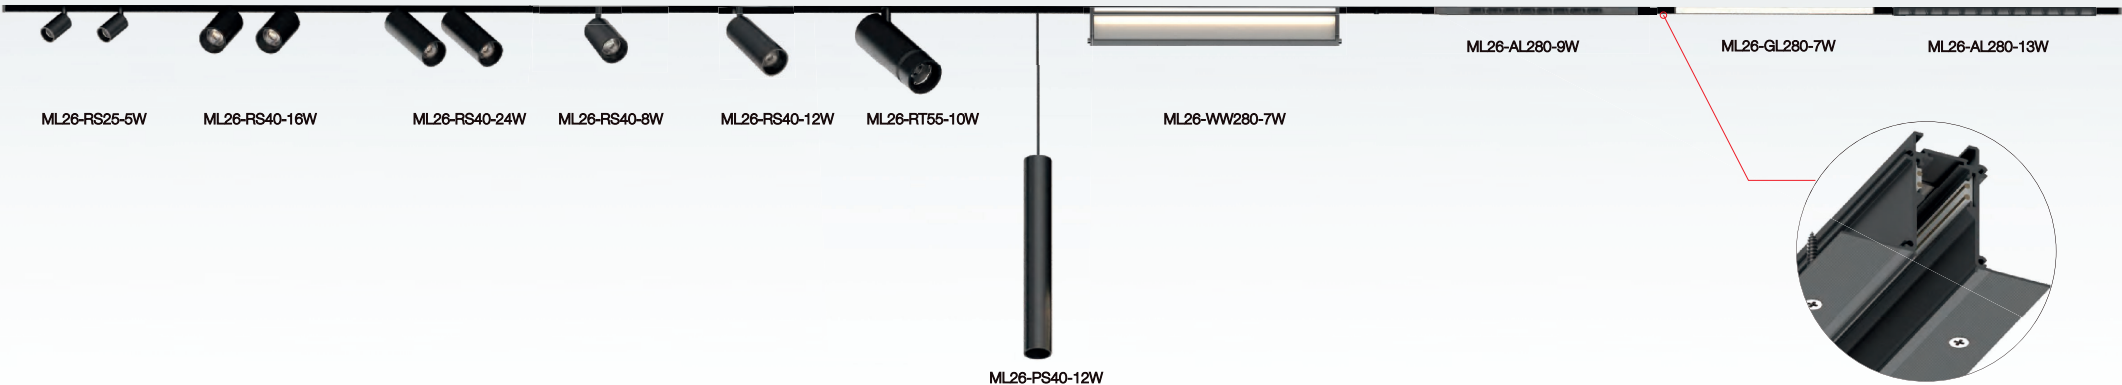


Trimless Recessed Track-EI



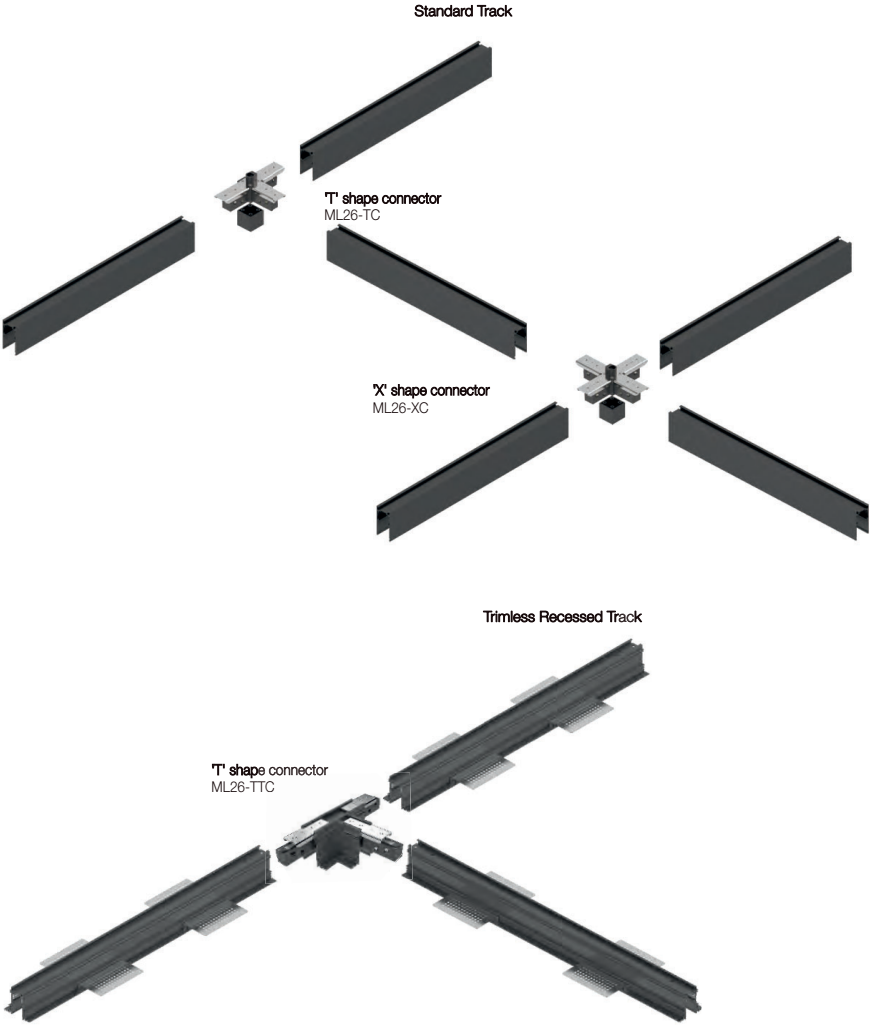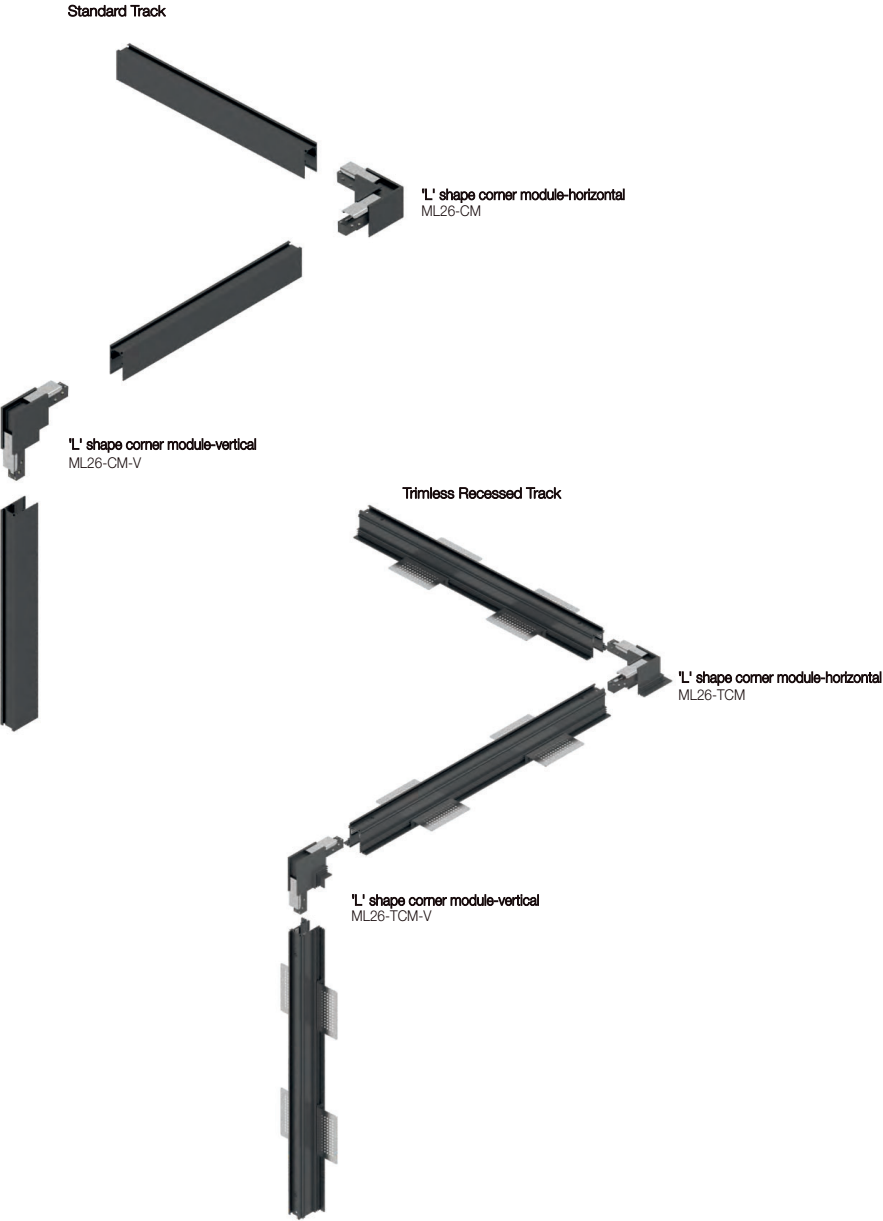



Installation

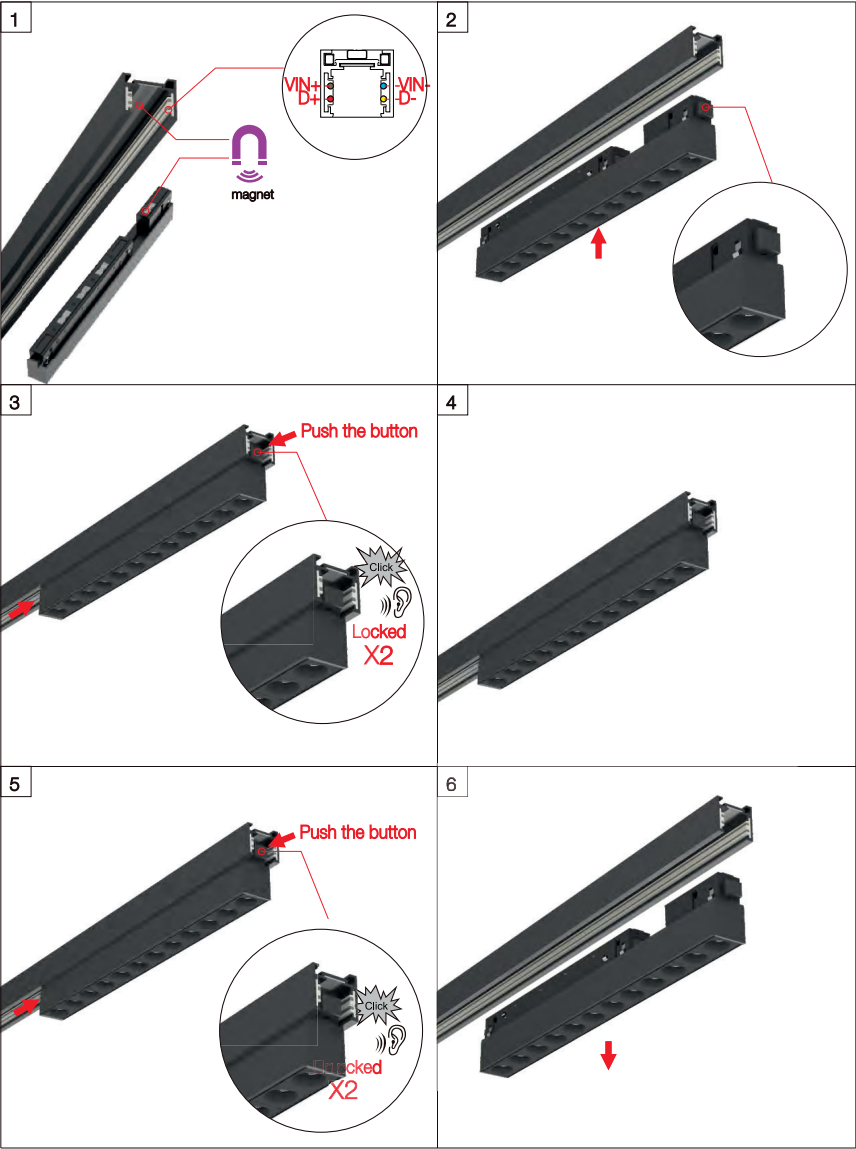

·Tool-free Insert mounting by magnetto+click-in double locking mechanism

NEKO / **MODULINE 26** Linear System

48V Low Voltage Modular Linear System

Slim Track System

NEW




Short info

- 48V low voltage system
- Slim Track Rail made of extruded aluminium with 26mm width groove and 27mm height
- Suitable for surface mounted or suspended with 1500mm steel cable
- Track Rail available with standard lengths 3000mm and 1000mm
- ‘L’ shape corner module, ‘T’ shape connector and ‘X’ shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets



Features

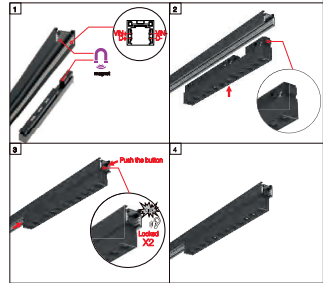


-Magnetic+click-in double locking mechanism

Short info

Moduline 26 Slim Track System

- Electrical**
- Non Dim
 - 1-10V Dim
 - DALI Dim

- Fixture Colour**
- Black

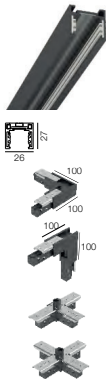

Moduline 26 Slim Track System

Please order installation track rail, light insets and mounting accessories separately.

Slim Track System Installation Track Rail

L (mm)	Description	Code/ Model
1000	Slim Track Rail	ML26-SR1000
3000	Slim Track Rail	ML26-SR3000
100*100	'L' shape corner module-horizontal	ML26-SCM
100*100	'L' shape corner module-vertical	ML26-SCM-V
100 per side	'T' shape connector	ML26-STC
100 per side	'X' shape connector	ML26-SXC

•Track Rail including endcaps and power feeder unit.

Accessories

Endcap

Description	Code/ Model
Endcap Kit (2pcs/ set) of Slim Track	ML26-SEK

Power Feeder Unit

Description	Code/ Model
Power Feeder Unit with feeder cables 500mm for surface mounted	ML26-PF
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P

Track Rail Cover

Description	Code/ Model
Track Rail Cover 925mm	ML26-RC1000
Track Rail Cover 2925mm	ML26-RC3000

•Track Rail Cover can be shortened as desired.

Connector Set

Description	Code/ Model
Linear Connector with screws	ML26-LC
Flexible Continuous Kit, Electrical	ML26-CKF

•Continuous Kit needs to be used together with Linear Connector as a set.

Installation Kit

Description	Code/ Model
Surface mounted installation kit, 1set for 1000mm track	ML26-SMK

Pendant Installation Kit
With 1pcs Ceiling Box for Power Feeder
With 2pcs Pendant Wire Kits

ML26-PK

Pendant Wire Kit, Wire in 2000mm Length
2pcs/ set for 1000mm Track


ML26-PWK

NEKO / **MODULINE 26** Linear System

48V Low Voltage Modular Linear System

Standard Track System

NEW

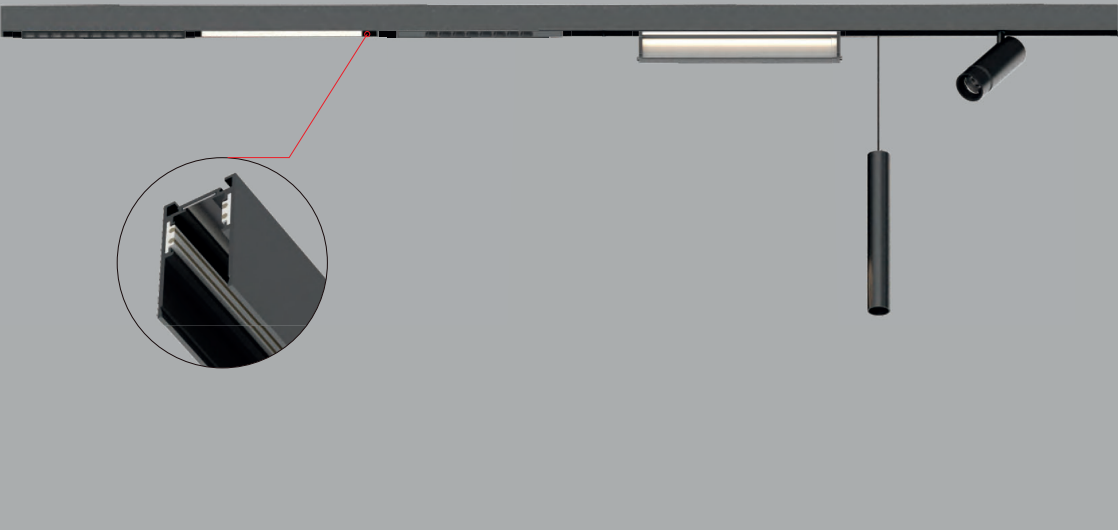


Short info

- 48V low voltage system
- Standard Track Rail made of extruded aluminium with 26mm width groove and 52mm height
- Suitable for surface mounted or suspended with 1500mm steel cable
- Track Rail available with standard lengths 3000mm and 1000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets



Features

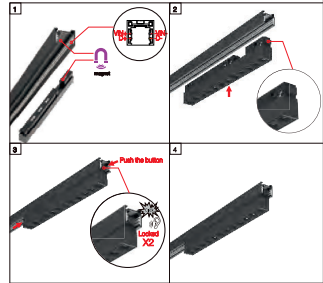


·Magnetic+click-in double locking mechanism

Short info

Moduline 26 Standard Track System

- Electrical**
- Non Dim
 - 1-10V Dim
 - DALI Dim
- Fixture Colour**
- Black

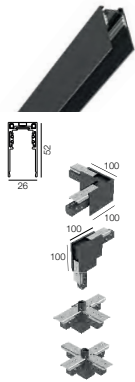

Moduline 26 Standard Track System

Please order installation track rail, light insets and mounting accessories separately.

Standard Track System Installation Track Rail

L (mm)	Description	Code/ Model
1000	Standard Track Rail	ML26-R1000
3000	Standard Track Rail	ML26-R3000
100*100	'L' shape corner module-horizontal	ML26-CM
100*100	'L' shape corner module-vertical	ML26-CM-V
100 per side	'T' shape connector	ML26-TC
100 per side	'X' shape connector	ML26-XC

·Track Rail including endcaps and power feeder unit.

Accessories

Endcap

Description	Code/ Model
Endcap Kit (2pcs/ set) of Standard Track	ML26-EK

Power Feeder Unit

Description	Code/ Model
Power Feeder Unit with feeder cables 500mm for surface mounted	ML26-PF
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P

Track Rail Cover

Description	Code/ Model
Track Rail Cover 925mm	ML26-RC1000
Track Rail Cover 2925mm	ML26-RC3000

·Track Rail Cover can be shortened as desired.

Connector Set

Description	Code/ Model
Linear Connector with screws	ML26-LC
Flexible Continuous Kit, Electrical	ML26-CKF

·Continuous Kit needs to be used together with Linear Connector as a set.

Installation Kit

Description	Code/ Model
Surface mounted installation kit, 1set for 1000mm track	ML26-SMK

Pendant Installation Kit
With 1pcs Ceiling Box for Power Feeder
With 2pcs Pendant Wire Kits

ML26-PK


Pendant Wire Kit, Wire in 2000mm Length
2pcs/ set for 1000mm Track

ML26-PWK

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Trimless Recessed Track System



NEW

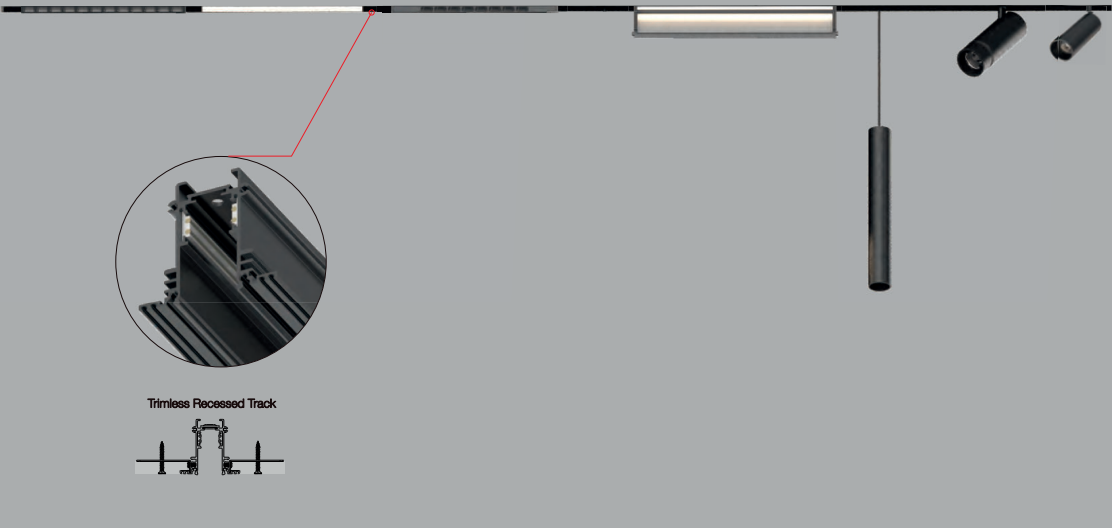


Short Info

- 48V low voltage system
- Trimless Recessed Track Rail made of extruded aluminium with 26mm width groove and 52mm height
- Suitable for 12.5mm-20.5mm thickness ceiling heights
- Track Rail available with standard lengths 3000mm and 1000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets



Features

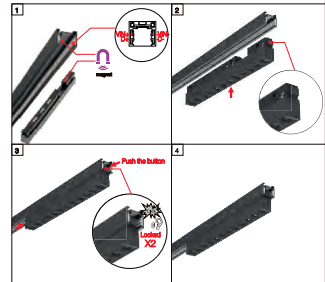


•Magnetic+click-in double locking mechanism

Short Info

Moduline 26 Trimless Recessed Track System

- Electrical
- Non Dim
 - 1-10V Dim
 - DALI Dim
- Fixture Colour
- Black

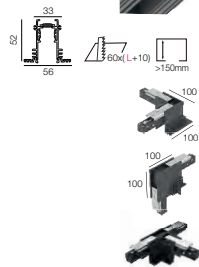

Moduline 26 Trimless Recessed Track System
Please order installation track rail, light insets and mounting accessories separately.

Trimless Recessed Track System Installation Track Rail		
L (mm)	Description	Code/ Model
1000	Trimless Recessed Track Rail	ML26-TR1000
3000	Trimless Recessed Track Rail	ML26-TR3000
100*100	'L' shape corner module-horizontal	ML26-TCM
100*100	'L' shape corner module-vertical	ML26-TCM-V
100 each side	'T' shape connector	ML26-TTC

•Track Rail including endcaps, mounting kits and power feeder unit.

Accessories

Endcap	
Description	Code/ Model
Endcap Kit (2pcs/ set) of Trimless Recessed Track	ML26-TEK

Power Feeder Unit	
Description	Code/ Model
Power Feeder Unit with feeder cables 500mm for recessed mounted	ML26-PF

Track Rail Cover	
Description	Code/ Model
Track Rail Cover 925mm	ML26-RC1000
Track Rail Cover 2925mm	ML26-RC3000

•Track Rail Cover can be shortened as desired.

Connector Set	
Description	Code/ Model
Flexible Continuous Kit, Electrical	ML26-LC


Installation Kit	
Description	Code/ Model
Trimless Recessed installation kit, 1set for 1000mm track	ML26-TIK

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System

Trimless Recessed Track System-EI

Easy Installation

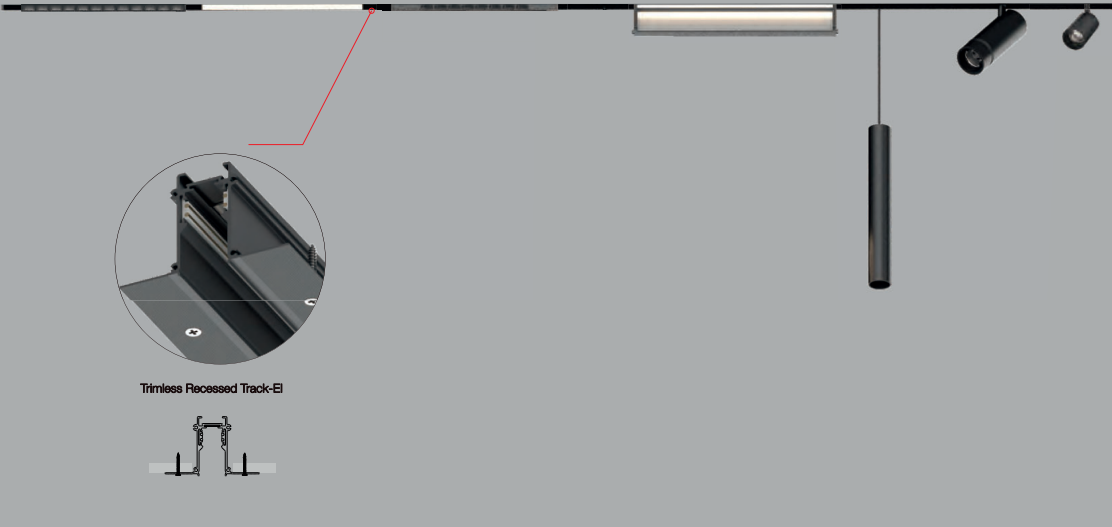


Short Info

- 48V low voltage system
- Trimless Recessed Track Rail Easy Installation Version made of extruded aluminium with 26mm width groove and 52mm height
- Mounted from surface, suitable for all thickness ceiling heights
- Track Rail available with standard lengths 3000mm and 1000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets



Features

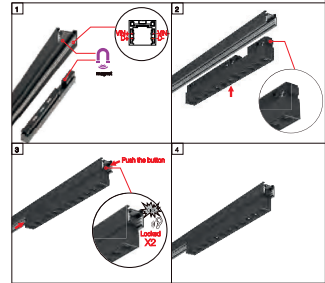

•Magnetic+click-in double locking mechanism

NEW

Short Info

Moduline 26 Trimless Recessed Track System

Easy Installation Version

Electrical

Non Dim

1-10V Dim

DALI Dim

Fixture Colour

Black



Moduline 26 Trimless Recessed Track System

Easy Installation Version

Please order installation track rail, light insets and mounting accessories separately.

Trimless Recessed Track System Easy Installation Version Installation Track Rail

L (mm)	Description	Code/ Model
1000	Trimless Recessed Track Rail-EI	ML26-TR1000-EI
3000	Trimless Recessed Track Rail-EI	ML26-TR3000-EI
100*100	'L' shape corner module-horizontal-EI	ML26-TCM-EI
100*100	'L' shape corner module-vertical-EI	ML26-TCM-EI-V

•Track Rail including endcaps and power feeder unit.

Accessories

Endcap

Description	Code/ Model
Endcap Kit (2pcs/ set) of Trimless Recessed Track-EI	ML26-TEK-EI



Power Feeder Unit

Description	Code/ Model
Power Feeder Unit with feeder cables 500mm for recessed mounted	ML26-PF



Track Rail Cover


Description	Code/ Model
Track Rail Cover 925mm	ML26-RC1000
Track Rail Cover 2925mm	ML26-RC3000

•Track Rail Cover can be shortened as desired.



Connector Set

Description	Code/ Model
Flexible Continuous Kit, Electrical	ML26-LC

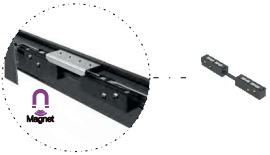

Installation Kit

Description	Code/ Model
Trimless Recessed Track mounting kit, 1set for 1000mm track	ML26-RMK



NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Spotlight Inset



ML26-RS25-5W
Single Spot

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Spotlight Inset




ML26-RS40-8W
Single Spot



ML26-RS40-16W
Double Spot

5W CRI90 2700K 3000K 4000K 18° 30° 45° OSRAM 50,000Hr L80B10 UGR < 19 IP20 5 YEAR WARRANTY CB CE




ML26-RS25-5W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
4W	5W	48 V	90	2700K	18°	420lm	330lm	MLR1-9271805X-BB
					30°	420lm	330lm	MLR1-9273005X-BB
					45°	420lm	330lm	MLR1-9274505X-BB
				3000K	18°	450lm	350lm	MLR1-9301805X-BB
					30°	450lm	350lm	MLR1-9303005X-BB
					45°	450lm	350lm	MLR1-9304505X-BB
				4000K	18°	500lm	380lm	MLR1-9401805X-BB
					30°	500lm	380lm	MLR1-9403005X-BB
					45°	500lm	380lm	MLR1-9404505X-BB

Code Remark: X=F(ON-OFF) X=A(1-10V Dim) X=D(DALI Dim)

8W 16W CRI90 2700K 3000K 4000K 18° 30° 45° CITIZEN 60,000Hr L80B10 UGR < 19 IP20 5 YEAR WARRANTY CB CE



ML26-RS40-8W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	8W	48 V	90	2700K	18°	700lm	550lm	MLR2-9271808X-BB
					30°	700lm	550lm	MLR2-9273008X-BB
					45°	700lm	400lm	MLR2-9274508X-BB
				3000K	18°	750lm	580lm	MLR2-9301808X-BB
					30°	750lm	580lm	MLR2-9303008X-BB
					45°	750lm	420lm	MLR2-9304508X-BB
				4000K	18°	800lm	640lm	MLR2-9401808X-BB
					30°	800lm	640lm	MLR2-9403008X-BB
					45°	800lm	460lm	MLR2-9404508X-BB

Code Remark: X=F(ON-OFF) X=A(1-10V Dim) X=D(DALI Dim)



ML26-RS40-16W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
15W	16W	48 V	90	2700K	18°	1400lm	1000lm	MLR3-9271816X-BB
					30°	1400lm	1000lm	MLR3-9273016X-BB
					45°	1400lm	800lm	MLR3-9274516X-BB
				3000K	18°	1500lm	1100lm	MLR3-9301816X-BB
					30°	1500lm	1100lm	MLR3-9303016X-BB
					45°	1500lm	850lm	MLR3-9304516X-BB
				4000K	18°	1600lm	1200lm	MLR3-9401816X-BB
					30°	1600lm	1200lm	MLR3-9403016X-BB
					45°	1600lm	900lm	MLR3-9404516X-BB

Code Remark: X=F(ON-OFF) X=A(1-10V Dim) X=D(DALI Dim)

NEW

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Spotlight Inset



ML26-RS40-12W
Single Spot



ML26-RS40-24W
Double Spot



ML26-RS40-12W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	48 V	90	2700K	18°	1000lm	700lm	MLR4-9271812X-BB
					30°	1000lm	700lm	MLR4-9273012X-BB
					45°	1000lm	550lm	MLR4-9274512X-BB
				3000K	18°	1100lm	750lm	MLR4-9301812X-BB
					30°	1100lm	750lm	MLR4-9303012X-BB
					45°	1100lm	600lm	MLR4-9304512X-BB
				4000K	18°	1200lm	800lm	MLR4-9401812X-BB
					30°	1200lm	800lm	MLR4-9403012X-BB
					45°	1200lm	650lm	MLR4-9404512X-BB

Code Remark: X=F(ON-OFF) X=A(1-10V Dim) X=D(DALI Dim)

ML26-RS40-24W

22W	24W	48 V	90	2700K	18°	2000lm	1400lm	MLR5-9271824X-BB
					30°	2000lm	1400lm	MLR5-9273024X-BB
					45°	2000lm	1100lm	MLR5-9274524X-BB
				3000K	18°	2200lm	1500lm	MLR5-9301824X-BB
					30°	2200lm	1500lm	MLR5-9303024X-BB
					45°	2200lm	1200lm	MLR5-9304524X-BB
				4000K	18°	2400lm	1600lm	MLR5-9401824X-BB
					30°	2400lm	1600lm	MLR5-9403024X-BB
					45°	2400lm	1300lm	MLR5-9404524X-BB

Code Remark: X=F(ON-OFF) X=A(1-10V Dim) X=D(DALI Dim)

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Spotlight Inset



ML26-RT55-10W
Zooming Spot



	LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code	
	9W	10W	48 V	90	2700K	20°-40°	1200lm	1000lm	MLR6-927Z410X-BB	
						35°-60°	1200lm	950lm	MLR6-927Z610X-BB	
						3000K	20°-40°	1300lm	1100lm	MLR6-930Z410X-BB
							35°-60°	1300lm	1000lm	MLR6-930Z610X-BB
						4000K	20°-40°	1400lm	1200lm	MLR6-940Z410X-BB
							35°-60°	1400lm	1100lm	MLR6-940Z610X-BB
Code Remark: X=F(ON-OFF) X=A(1-10V Dim) X=D(DALI Dim)										

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Accent Light Inset



ML26-AL190-3W

ML26-AL190-7W


ML26-AL280-9W

ML26-AL280-13W

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Adjustable Accent Light Inset



ML26-SA280-13W
Adjustable Accent Light Inset



ML26-AL190-3W



ML26-AL190-7W




ML26-AL280-9W



ML26-AL280-13W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	48 V	90	2700K	20°	230lm	170lm	MLA3-9272003X-BB
					35°	230lm	170lm	MLA3-9273503X-BB
				3000K	20°	250lm	180lm	MLA3-9302003X-BB
					35°	250lm	180lm	MLA3-9303503X-BB
				4000K	20°	270lm	200lm	MLA3-9402003X-BB
					35°	270lm	200lm	MLA3-9403503X-BB
Code Remark: X=F(ON-OFF) X=A(1-10V Dim) X=D(DALI Dim)								
6W	7W	48 V	90	2700K	20°	700lm	500lm	MLA4-9272007X-BB
					35°	700lm	500lm	MLA4-9273507X-BB
				3000K	20°	750lm	550lm	MLA4-9302007X-BB
					35°	750lm	550lm	MLA4-9303507X-BB
				4000K	20°	820lm	600lm	MLA4-9402007X-BB
					35°	820lm	600lm	MLA4-9403507X-BB
Code Remark: X=F(ON-OFF) X=A(1-10V Dim) X=D(DALI Dim)								
8W	9W	48 V	90	2700K	20°	950lm	700lm	MLA1-9272009X-BB
					35°	950lm	700lm	MLA1-9273509X-BB
				3000K	20°	1000lm	750lm	MLA1-9302009X-BB
					35°	1000lm	750lm	MLA1-9303509X-BB
				4000K	20°	1100lm	800lm	MLA1-9402009X-BB
					35°	1100lm	800lm	MLA1-9403509X-BB
Code Remark: X=F(ON-OFF) X=A(1-10V Dim) X=D(DALI Dim)								
12W	13W	48 V	90	2700K	20°	1400lm	1000lm	MLA2-9272013X-BB
					35°	1400lm	1000lm	MLA2-9273513X-BB
				3000K	20°	1500lm	1100lm	MLA2-9302013X-BB
					35°	1500lm	1100lm	MLA2-9303513X-BB
				4000K	20°	1600lm	1200lm	MLA2-9402013X-BB
					35°	1600lm	1200lm	MLA2-9403513X-BB
Code Remark: X=F(ON-OFF) X=A(1-10V Dim) X=D(DALI Dim)								



ML26-SA280-13W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	48 V	90	2700K	20°	1400lm	1000lm	MLA5-9272013X-BB
					35°	1400lm	1000lm	MLA5-9273513X-BB
				3000K	20°	1500lm	1100lm	MLA5-9302013X-BB
					35°	1500lm	1100lm	MLA5-9303513X-BB
				4000K	20°	1600lm	1200lm	MLA5-9402013X-BB
					35°	1600lm	1200lm	MLA5-9403513X-BB
Code Remark: X=F(ON-OFF) X=A(1-10V Dim) X=D(DALI Dim)								

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
General Light Inset



NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Adjustable General Light Inset




Table with 10 columns: LED, Power, System Power, LED Voltage, CRI, CCT, Beam, LED Output, System Output, Code. It lists specifications for four models: ML26-GL280-7W, ML26-GL560-13W, ML26-GL840-19W, and ML26-GL1120-26W.



Table with 10 columns: LED, Power, System Power, LED Voltage, CRI, CCT, Beam, LED Output, System Output, Code. It lists specifications for the adjustable model ML26-SG280-7W.

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Pendant Spot Inset



ML26-PS40-12W

12W CRI90 2700K 3000K 4000K 18° 30° 45° CITIZEN 80,000hMLJ0810 UGR < 19 IP20 5 YEAR GUARANTEE CB CE



ML26-PS40-12W

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code				
11W	12W	48 V	90	2700K	18°	1000lm	700lm	MLP1-9271812X-BB					
					30°	1000lm	700lm	MLP1-9273012X-BB					
					45°	1000lm	550lm	MLP1-9274512X-BB					
				3000K	18°	1100lm	750lm	MLP1-9301812X-BB					
					30°	1100lm	750lm	MLP1-9303012X-BB					
					45°	1100lm	600lm	MLP1-9304512X-BB					
				4000K	18°	1200lm	800lm	MLP1-9401812X-BB					
					30°	1200lm	800lm	MLP1-9403012X-BB					
					45°	1200lm	650lm	MLP1-9404512X-BB					
											Code Remark: X=F(ON-OFF) X=A(1-10V Dim) X=D(DALI Dim)		

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Pendant Spot Inset



ML26-PS55-14W

14W CRI90 2700K 3000K 4000K 18° 30° 45° CITIZEN 80,000hMLJ0810 UGR < 19 IP20 5 YEAR GUARANTEE CB CE



ML26-PS55-14W

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code		
13W	14W	48 V	90	2700K	18°	1100lm	900lm	MLP2-9271814X-BE			
					30°	1100lm	900lm	MLP2-9273014X-BE			
					45°	1100lm	750lm	MLP2-9274514X-BE			
					3000K	18°	1200lm	950lm	MLP2-9301814X-BE		
						30°	1200lm	950lm	MLP2-9303014X-BE		
						45°	1200lm	800lm	MLP2-9304512X-BE		
				4000K	18°	1300lm	1000lm	MLP2-9401814X-BE			
					30°	1300lm	1000lm	MLP2-9403014X-BE			
					45°	1300lm	850lm	MLP2-9404514X-BE			
					Code Remark: X=F(ON-OFF) X=A(1-10V Dim) X=D(DALI Dim)						


NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Wall Washer Inset




NEW



ML26-WW280-7W




ML26-WW560-13W




ML26-WW280-7W



ML26-WW560-13W

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
	6W	7W	48 V	90	2700K	Wall Washer	550lm	330lm	MLW1-927A107X-BB
						3000K Wall Washer	600lm	350lm	MLW1-930A107X-BB
						4000K Wall Washer	650lm	400lm	MLW1-940A107X-BB
						Code Remark: X=F(ON-OFF) X=A(1-10V Dim) X=D(DALI Dim)			
	12W	13W	48 V	90	2700K	Wall Washer	1100lm	670lm	MLW2-927A113X-BB
						3000K Wall Washer	1200lm	700lm	MLW2-930A113X-BB
						4000K Wall Washer	1300lm	750lm	MLW2-940A113X-BB
						Code Remark: X=F(ON-OFF) X=A(1-10V Dim) X=D(DALI Dim)			

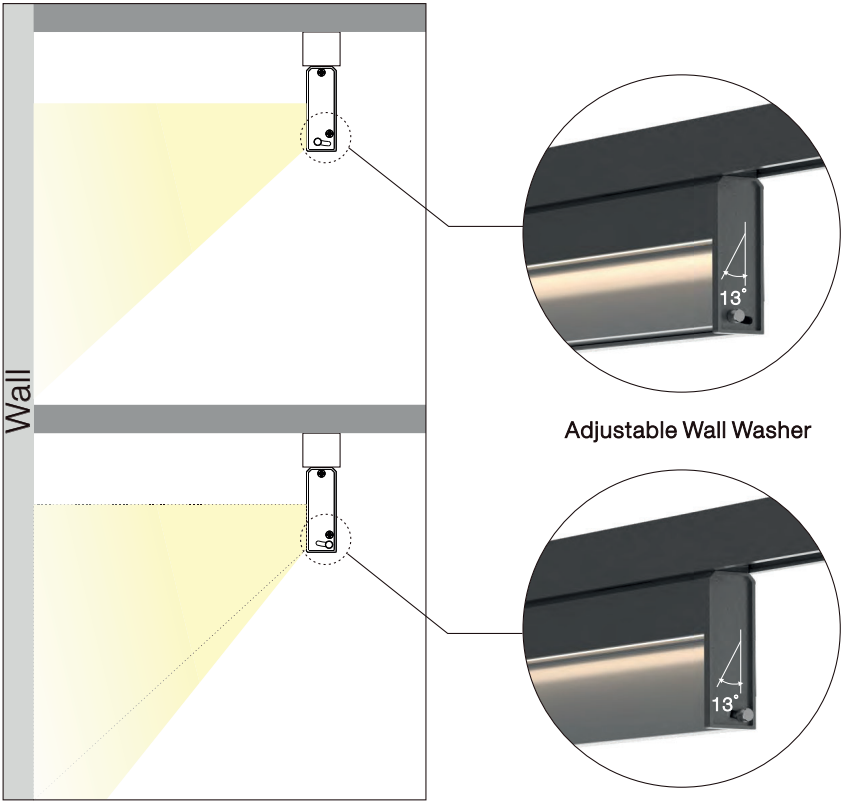

Adjustable Wall Washer