
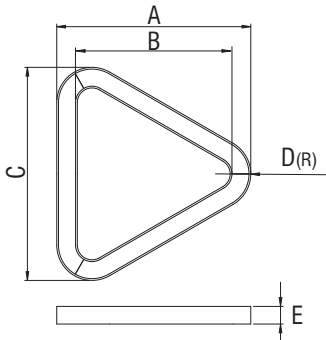


# CYCLONE

## CYCLONE TR


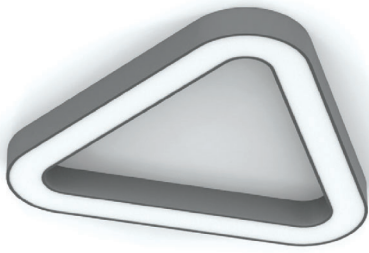


- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:  
164Lm/W at 4000K 300mA  
157Lm/W at 3000K 300mA
- Upon request in Up Down edition.

Code	Description	Dimensions mm				
		A	B	C	D(R)	E
8241172	Cyclone 1 TR 53W Warm	760	480	800	240	120
8241173	Cyclone 1 TR 53W Neutral	760	480	800	240	120
8241182	Cyclone 2 TR 75W Warm	1020	740	1100	240	120
8241183	Cyclone 2 TR 75W Neutral	1020	740	1100	240	120
8241192	Cyclone 3 TR 96W Warm	1320	1040	1450	240	120
8241193	Cyclone 3 TR 96W Neutral	1320	1040	1450	240	120

For dimmer version add letter "D" at the end of product code.

## CYCLONE SLIM TR

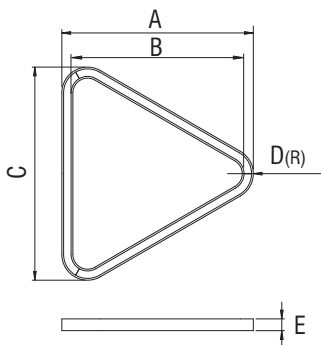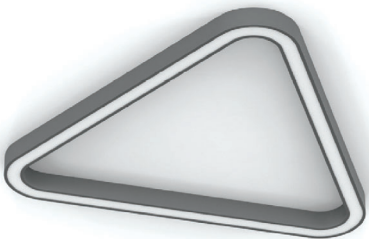

- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:  
164Lm/W at 4000K 300mA  
157Lm/W at 3000K 300mA
- Upon request in Up Down edition.

Code	Description	Dimensions mm				
		A	B	C	D(R)	E
8241202	Cyclone Slim 1 TR 50W Warm	700	550	750	175	80
8241203	Cyclone Slim 1 TR 50W Neutral	700	550	750	175	80
8241212	Cyclone Slim 2 TR 75W Warm	1000	850	1100	175	80
8241213	Cyclone Slim 2 TR 75W Neutral	1000	850	1100	175	80
8241222	Cyclone Slim 3 TR 96W Warm	1300	1150	1450	175	80
8241223	Cyclone Slim 3 TR 96W Neutral	1300	1150	1450	175	80


For dimmer version add letter "D" at the end of product code.

**Colour Codes:**

- 0 Colours 1 White 2 Titan 3 Black

# CYCLONE

## SINGLE ADJUSTABLE SUSPENSION

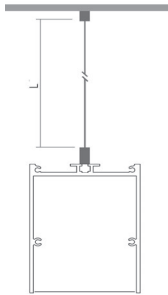

- Stainless steel cable and regulators.
- **Required:**  
3 pieces for each CYCLONE/CYCLONE SLIM luminaire  
4 pieces for CYCLONE SLIM SMOOTH luminaire

Code	Description	L	Kg
900111	Single Suspension	500	0,050
900112	Single Suspension	1000	0,100
900113	Single Suspension	1500	0,150
900114	Single Suspension	2000	0,200
900116	Single Suspension	3000	0,300

## POWER SUPPLY



- Plastic body.
- With transparent cable 3x0,75mm<sup>2</sup> or 5x0,50mm<sup>2</sup> for dimmer.

Code	Description	L	Kg
900122	Power Supply 3x0,75mm <sup>2</sup> with Rosette Ø75	1000	0,120
900124	Power Supply 3x0,75mm <sup>2</sup> with Rosette Ø75	2000	0,240
900126	Power Supply 3x0,75mm <sup>2</sup> with Rosette Ø75	3000	0,360
900127	Power Supply 3x0,75mm <sup>2</sup> with Rosette Ø75	4000	0,500
900162	Power Supply 5x0,50mm <sup>2</sup> with Rosette Ø75	1000	0,120
900164	Power Supply 5x0,50mm <sup>2</sup> with Rosette Ø75	2000	0,240
900166	Power Supply 5x0,50mm <sup>2</sup> with Rosette Ø75	3000	0,360
900167	Power Supply 5x0,50mm <sup>2</sup> with Rosette Ø75	4000	0,500

## POWER SUPPLY



- For pendant use.
- Body from aluminium profile.
- With transparent cable 3x0,75mm<sup>2</sup> or 5x0,50mm<sup>2</sup> for dimmer.
- Square or round version.

Code	Description	Kg
90042	Power Supply 3x0,75mm <sup>2</sup> L 2m Ø80	0,130
90043	Power Supply 3x0,75mm <sup>2</sup> L 2m Ø70	0,130
90044	Power Supply 3x0,75mm <sup>2</sup> L 2m 80x80	0,210
90045	Power Supply 3x0,75mm <sup>2</sup> L 2m 70x70	0,200
90048	Power Supply 5x0,50mm <sup>2</sup> L 2m Ø100	0,250
90049	Power Supply 5x0,50mm <sup>2</sup> L 2m 100x100	0,300

### Colour Codes:

0 Colours 1 White 2 Titan 3 Black