

CYCLONE TRIMLESS




An opal circular luminaire with a contemporary design. CYCLONE is a piece of architecture, perfect for adding stature to an area. With its gentle uniform lighting, it upgrades areas such as lobbies, corridors, offices, stores and homes.

Technical Features

- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- Direct illumination.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V/50Hz.



Upon Request

- Connection for emergency lighting system, for one or three hours.
- With microprismatic cover (only for Cyclone Slim Trimless version)*.

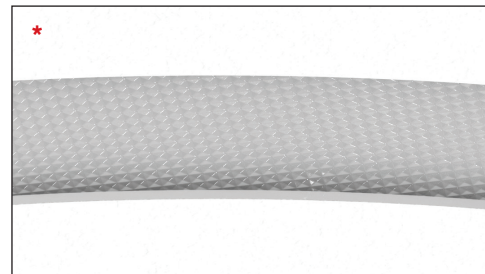


CYCLONE TRIMLESS

CYCLONE TRIMLESS

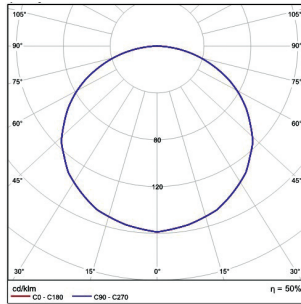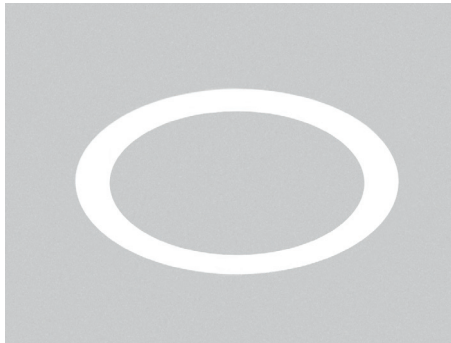

ta 25°C



- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
168 Lm/W at 4000K 300mA
160 Lm/W at 3000K 300mA

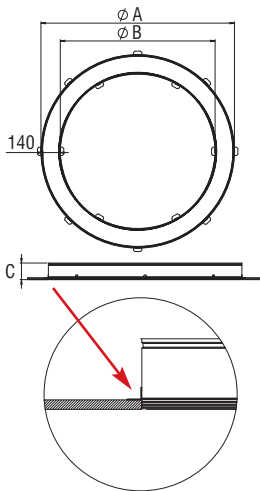

Code	Description	Dimensions mm		
		ØA	ØB	C
82420121	Cyclone 1 43W Warm	700	420	120
82420131	Cyclone 1 43W Neutral	700	420	120
82420221	Cyclone 2 56W Warm	900	620	120
82420231	Cyclone 2 56W Neutral	900	620	120
82420321	Cyclone 3 79W Warm	1200	920	120
82420331	Cyclone 3 79W Neutral	1200	920	120
82420421	Cyclone 4 92W Warm	1400	1120	120
82420431	Cyclone 4 92W Neutral	1400	1120	120


For dimmer version add letter “D” at the end of product code.

CYCLONE SLIM TRIMLESS

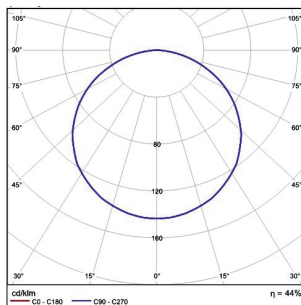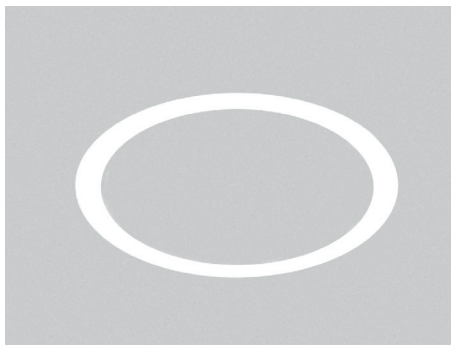

ta 25°C

- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
168 Lm/W at 4000K 300mA
160 Lm/W at 3000K 300mA

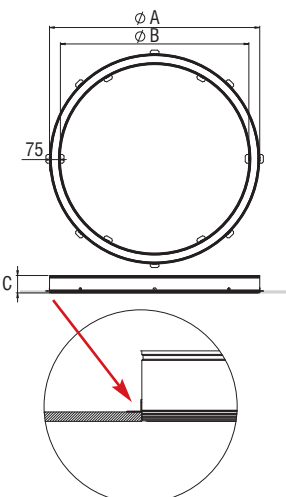



Code	Description	Dimensions mm		
		ØA	ØB	C
82420521	Cyclone Slim 1 38W Warm *	600	450	120
82420531	Cyclone Slim 1 38W Neutral *	600	450	120
82420621	Cyclone Slim 2 52W Warm	800	650	120
82420631	Cyclone Slim 2 52W Neutral	800	650	120
82420721	Cyclone Slim 3 79W Warm	1100	950	120
82420731	Cyclone Slim 3 79W Neutral	1100	950	120
82420821	Cyclone Slim 4 99W Warm	1450	1300	120
82420831	Cyclone Slim 4 99W Neutral	1450	1300	120

For dimmer version add letter “D” at the end of product code.



* At dimmer version the driver is placed out of the body.

CYCLONE TRIMLESS

CYCLONE TR TRIMLESS

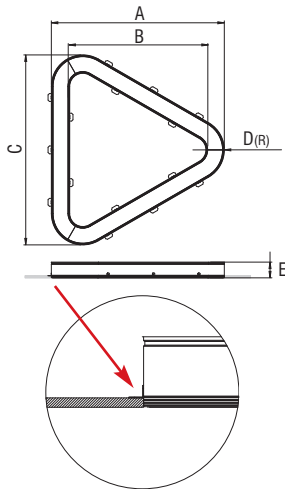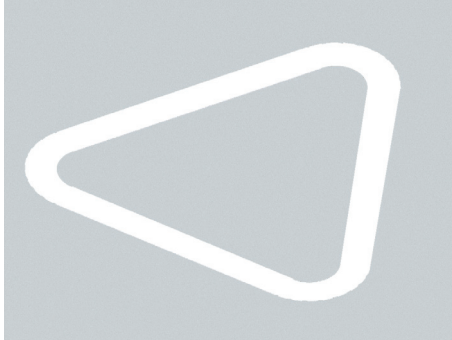

CYCLONE SLIM TR TRIMLESS

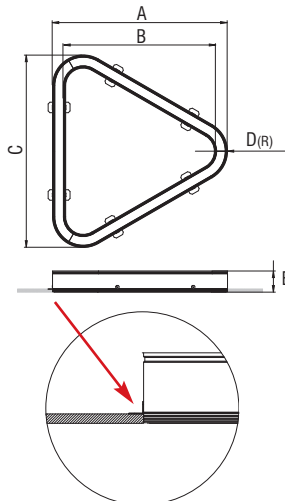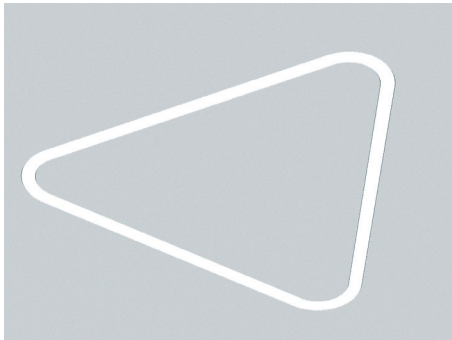

- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
168 Lm/W at 4000K 300mA
160 Lm/W at 3000K 300mA

Code	Description	Dimensions mm				
		ØA	ØB	C	D(R)	E
82421721	Cyclone 1 TR 53W Warm	760	480	800	240	120
82421731	Cyclone 1 TR 53W Neutral	760	480	800	240	120
82421821	Cyclone 2 TR 75W Warm	1020	740	1100	240	120
82421831	Cyclone 2 TR 75W Neutral	1020	740	1100	240	120
82421921	Cyclone 3 TR 96W Warm	1320	1040	1450	240	120
82421931	Cyclone 3 TR 96W Neutral	1320	1040	1450	240	120

For dimmer version add letter "D" at the end of product code.





- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
168 Lm/W at 4000K 300mA
160 Lm/W at 3000K 300mA

Code	Description	Dimensions mm				
		ØA	ØB	C	D(R)	E
82422021	Cyclone Slim 1 TR 50W Warm	700	550	750	175	120
82422031	Cyclone Slim 1 TR 50W Neutral	700	550	750	175	120
82422121	Cyclone Slim 2 TR 75W Warm	1000	850	1100	175	120
82422131	Cyclone Slim 2 TR 75W Neutral	1000	850	1100	175	120
82422221	Cyclone Slim 3 TR 96W Warm	1300	1150	1450	175	120
82422231	Cyclone Slim 3 TR 96W Neutral	1300	1150	1450	175	120

For dimmer version add letter "D" at the end of product code.

CYCLONE TRIMLESS

CYCLONE SQ TRIMLESS

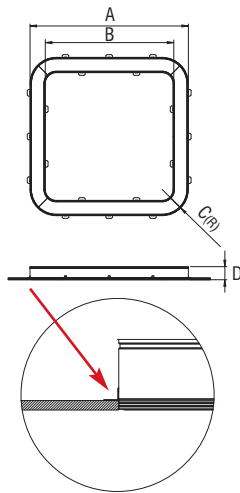
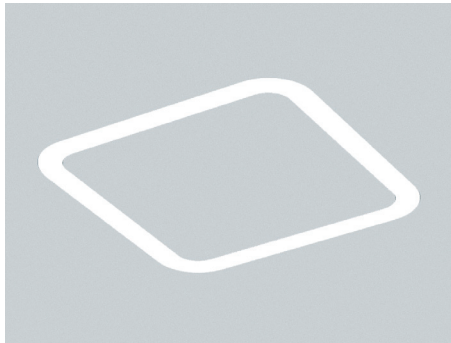


- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
168 Lm/W at 4000K 300mA
160 Lm/W at 3000K 300mA

Code	Description	Dimensions mm			
		A	B	C ^(R)	D
82422321	Cyclone 1 SQ 56W Warm	800	520	240	120
82422331	Cyclone 1 SQ 56W Neutral	800	520	240	120
82422421	Cyclone 2 SQ 85W Warm	1100	820	240	120
82422431	Cyclone 2 SQ 85W Neutral	1100	820	240	120
82422521	Cyclone 3 SQ 113W Warm	1450	1170	240	120
82422531	Cyclone 3 SQ 113W Neutral	1450	1170	240	120

For dimmer version add letter "D" at the end of product code.

CYCLONE SLIM SQ TRIMLESS

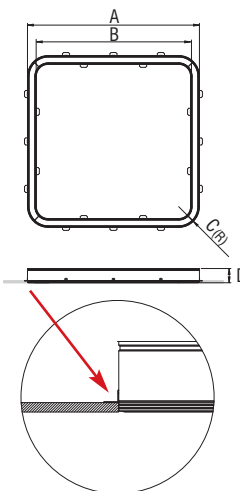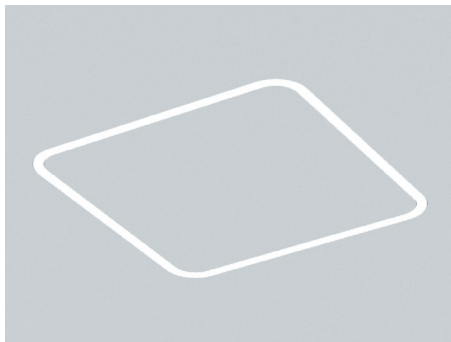

- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
168 Lm/W at 4000K 300mA
160 Lm/W at 3000K 300mA

Code	Description	Dimensions mm			
		A	B	C ^(R)	D
82422621	Cyclone Slim 1 SQ 70W Warm	850	700	175	120
82422631	Cyclone Slim 1 SQ 70W Neutral	850	700	175	120
82422721	Cyclone Slim 2 SQ 99W Warm	1150	1000	175	120
82422731	Cyclone Slim 2 SQ 99W Neutral	1150	1000	175	120
82422821	Cyclone Slim 3 SQ 126W Warm	1450	1300	175	120
82422831	Cyclone Slim 3 SQ 126W Neutral	1450	1300	175	120

For dimmer version add letter "D" at the end of product code.

CYCLONE TRIMLESS



CYCLONE TRIMLESS

