



AMARANTE

SPECIFICATIONS



PRODUCT NAME	AMARANTE
HOUSING	Moulded aluminium base Tubular steel column Ø 168 mm
BOWL	Clear polycarbonate, Ø 170 mm
FINISH	Polyester powder coating, any colour available
SOURCES	KIDLED
COLOUR TEMPERATURE	Amber*, 2200K, 2700 K, 3000K, 4000 K
OPTICAL	ORALENS:
FLUX & POWER**	Up to 6411lm; 52W
ELECTRICAL CLASS	Class I or II
WIRING	Pre-wired at the factory
MOUNTING	Post top


*Approx. 1800K

**At 3000K, in accordance with performance standards IEC 62717 and IEC 62722 (+/-5%tolerance)




- ▶ Smart-ready® (ZD4i)
- ▶ Dimming
- ▶ Detection
- ▶ WIZARD management system (pag. 420)

MECHANICAL INTERFACES



Post top

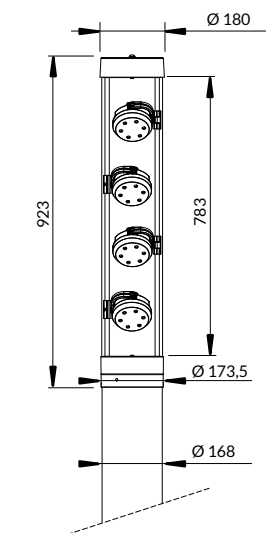



AMARANTE



AMARANTE
Configuration

Column height: 4m



AMARANTE
Configuration

Sublimated timber
column
Column height: 4m



AMARANTE
Configuration

Strium CAPITAN
column
Column height: 4m