# STANZA

## SPECIFICATIONS

02 RoHS ZDi IP 66 IK 10

| PRODUCT NAME | STANZA POST TOP STANZA SUSPENDED |
|---|---|
| HOUSING | Die-cast aluminium body<br>Arms in polycarbonate (UV treatment) |
| BOWL | Thermally toughened flat glass |
| FINISH | Polyester powder coating, any colour available |
| SOURCES | SOMLED 1 / BLS Strips |
| COLOUR TEMPERATURE | **SOMLED 1**: 3000K or 4000K<br>**BLS**: Amber*, 2200 K, 2400 K, 2700 K, 3000K, 4000 K |
| OPTICAL | ORALENS / QUADRALENS |
| FLUX & POWER** | Up to 11 735lm; 102W |
| ELECTRICAL CLASS | Class I or II |
| WIRING | Pre-wired at the factory (6 m)<br>(post top version only) |
| MOUNTING | Post top, suspended |

*Approx. 1800K
**At 3000K, in accordance with performance standards IEC 62717 and IEC 62722 (+/-5%tolerance)

SMART

- Smart-ready® (Zd4i)
- Dimming
- Detection
- Tunable white options
- WIZARD management system (pag. 420)

## MECHANICAL INTERFACES

POST TOP SUSPENDED

Post top with aluminium frame




Suspended with aluminium frame




Suspended without bracket




Suspended with polycarbonate bracket






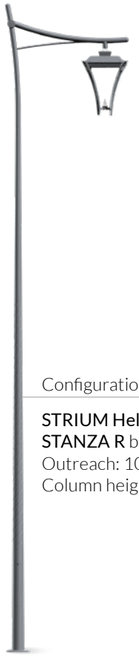

Configuration

**STRIUM Helix** column
**STANZA R** bracket
Outreach: 1000mm
Column height: 7m

Configuration

Column ø 76 mm
**STANZA C** bracket
Outreach: 800mm
Column height: 5m

Configuration

**FESTONE** column
Column height: 4m

Design: Christophe CANADELL