


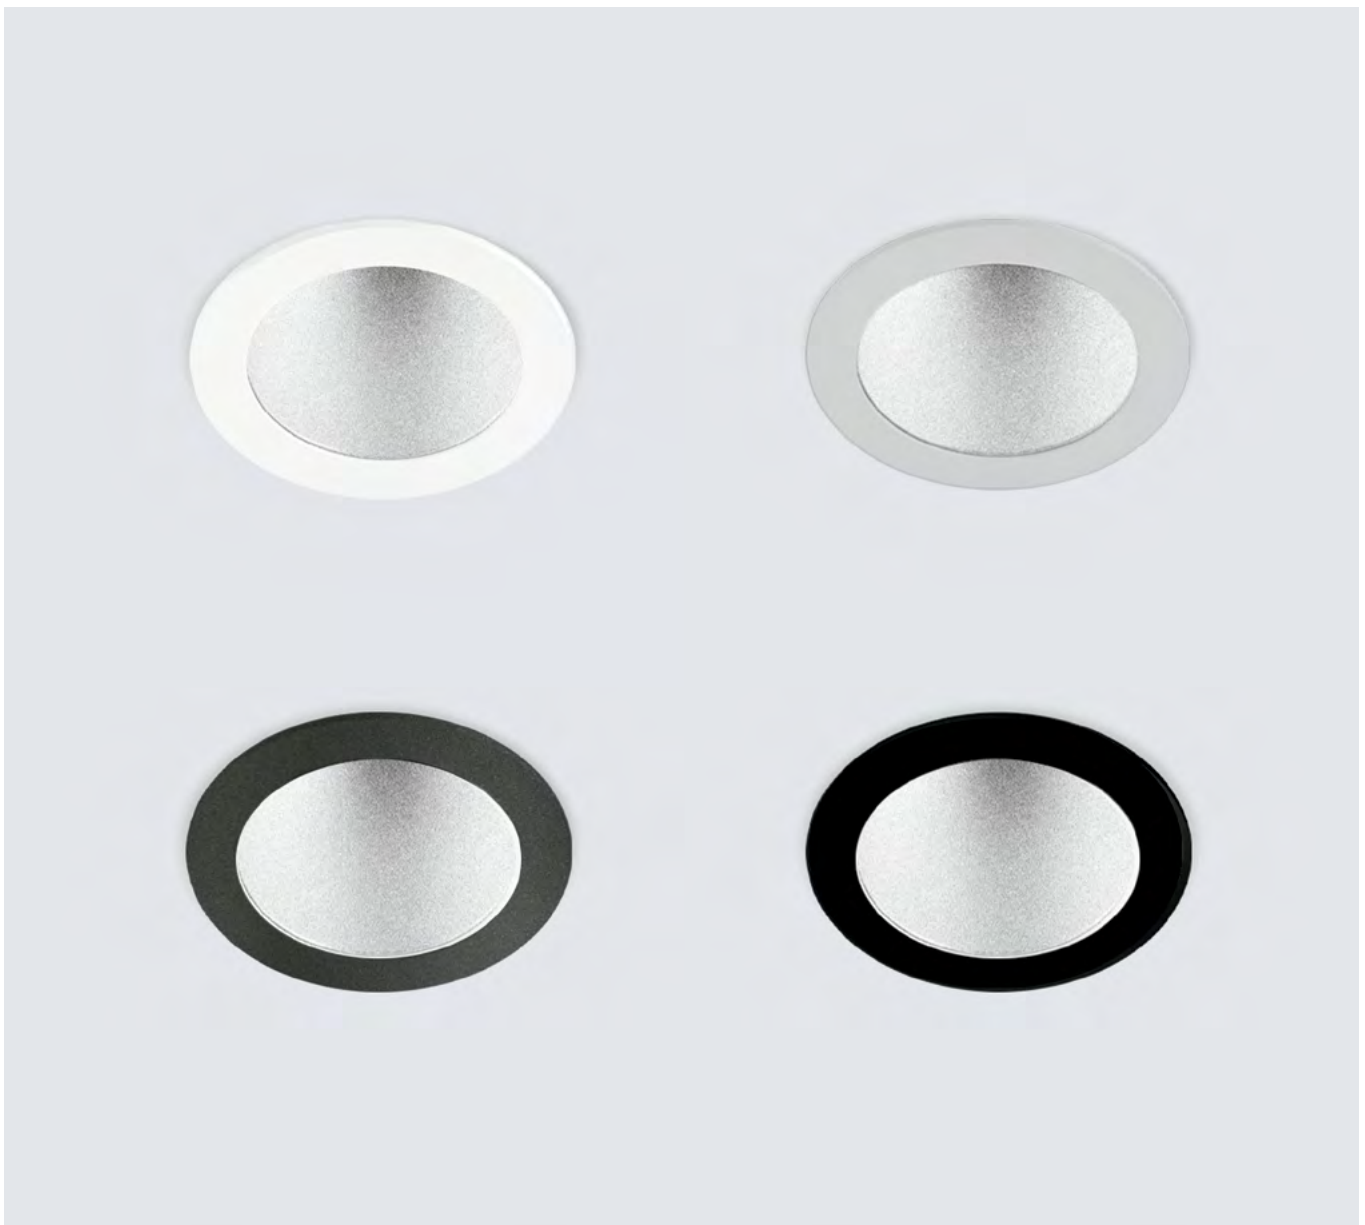


Atomic

Lighting performance designed for architecture.

The range of protective accessories boosts versatility and allows each installation to be tailored to the aesthetic and functional requirements of the space.

Recessed downlights with symmetrical light distribution designed to offer effective accent, task or general lighting. The die-cast aluminium trim and the metallised aluminium reflectors guarantee high-level optical and aesthetic quality.

They combine high performance and energy efficiency. These luminaires can be enhanced by a range of IP54 (IK05) or IP65 (IK07 / IK10) protective accessories.



Ø 150 mm	Ø 190 mm	Ø 220 mm	Ø 240 mm
784lm – 7457lm	827lm – 6392lm	784lm – 6310lm	837lm – 6966lm
12° · 16° · 24° · 26° · 40° 43° · 50° · 55° · 105°	12° · 16° · 24° · 26° · 39° 42° · 77° · 79° · 112°	12° · 16° · 24° · 26° · 36° 38° · 92° 94° · 113°	37° · 38° · 96° · 97° · 109°
UGR<16 · UGR<19	UGR<16 · UGR<19	UGR<16 · UGR<19	UGR<16 · UGR<19
CRI>80 · CRI>90 R9	CRI>80 · CRI>90 R9	CRI>80 · CRI>90 R9	CRI>80 · CRI>90 R9
2700K · 3000K · 4000K	2700K · 3000K · 4000K	2700K · 3000K · 4000K	2700K · 3000K · 4000K
Tunable White	Tunable White	Tunable White	Tunable White
Optimal Display	Optimal Display	Optimal Display	Optimal Display
11,9W – 50,5W	11,9W – 50,5W	11,9W – 50,5W	11,9W – 50,5W
100.000h L90B10	100.000h L90B10	100.000h L90B10	100.000h L90B10
On Off · DALI-2 · Bluetooth · 3 hours battery			

Key accessories



IP54 · IK05
(from below)



IP65 · IK07 | IK10
(from below)



Fixtures with low depth
(from 50 mm height)



 Zuyd Hogeschool
 Herleen, Netherlands

