



paco rabanne


CLARINS CLINIQUE



PURE

| PURE Art | PURE S | PURE M |
|----------------|------------------------------------|-----------------|
| 15W 950-1000lm | 15W 1200-1300lm 21W 1600-1700lm | 28W 2700-2900lm |

Narrow, medium and wide beam angles are available for different lighting applications

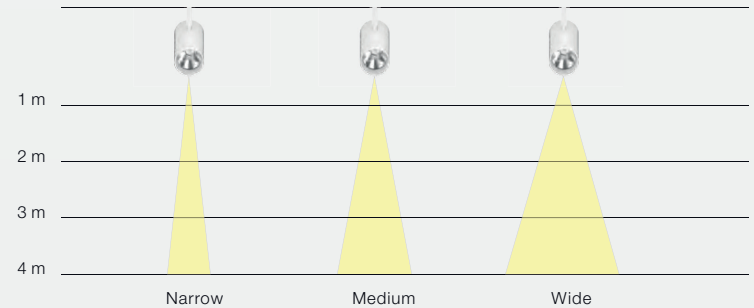

NEKO / PURE Art
LED Tracklight

Project: VALO Hotel Helsinki, Finland



15W CRI90 2700K 18° 3000K 24° 4000K 36° CITIZEN 60,000hrs L80B10 UGR < 19 IP 20 5 YEAR WARRANTY CB CE



| LED Power | System Power | LED Voltage | LED Current | CRI | CCT | Beam | LED Output | System Output | Code | |
|-----------|--------------|-------------|-------------|-----|-------|-------|------------|---------------|------------------|------------------|
| 13 W | 15 W | 36 V | 350 mA | 90 | 2700K | 18° | 1100lm | 900lm | PUA2-9271815F-WB | |
| | | | | | | 24° | 1100lm | 900lm | PUA2-9272415F-WB | |
| | | | | | | 36° | 1100lm | 900lm | PUA2-9273615F-WB | |
| | | | | | | 3000K | 18° | 1200lm | 950lm | PUA2-9301815F-WB |
| | | | | | | | 24° | 1200lm | 950lm | PUA2-9302415F-WB |
| | | | | | | | 36° | 1200lm | 950lm | PUA2-9303615F-WB |
| | | | | | | 4000K | 18° | 1300lm | 1000lm | PUA2-9401815F-WB |
| | | | | | | | 24° | 1300lm | 1000lm | PUA2-9402415F-WB |
| | | | | | | | 36° | 1300lm | 1000lm | PUA2-9403615F-WB |

| | | | | | | | | | | |
|------|------|------|--------|----|-------|-------|--------|--------|------------------|------------------|
| 13 W | 15 W | 36 V | 350 mA | 90 | 2700K | 18° | 1100lm | 900lm | PUA2-9271815F-BB | |
| | | | | | | 24° | 1100lm | 900lm | PUA2-9272415F-BB | |
| | | | | | | 36° | 1100lm | 900lm | PUA2-9273615F-BB | |
| | | | | | | 3000K | 18° | 1200lm | 950lm | PUA2-9301815F-BB |
| | | | | | | | 24° | 1200lm | 950lm | PUA2-9302415F-BB |
| | | | | | | | 36° | 1200lm | 950lm | PUA2-9303615F-BB |
| | | | | | | 4000K | 18° | 1300lm | 1000lm | PUA2-9401815F-BB |
| | | | | | | | 24° | 1300lm | 1000lm | PUA2-9402415F-BB |
| | | | | | | | 36° | 1300lm | 1000lm | PUA2-9403615F-BB |

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory



Honeycomb

Code for PUA2-930 1815F-WB with Honeycomb
PUA2-930 1815F-WB-H

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System.

NEKO / PURE S
LED Tracklight



21W 15W CRI90 2700K 3000K 4000K 15° 25° 30° CITIZEN 60,000h@L80B10 UGR < 19 IP20 5 YEAR WARRANTY CB CE

| LED Power | System Power | LED Voltage | LED Current | CRI | CCT | Beam | LED Output | System Output | Code | | | | | | |
|-----------|--------------|-------------|-------------|------------------|-------|-------|------------|---------------|------------------|------------------|-------|-----|--------|--------|------------------|
| 13 W | 15 W | 36 V | 350 mA | 90 | 2700K | 15° | 1400lm | 1100lm | PUS1-9271515F-WB | | | | | | |
| | | | | | | 25° | 1400lm | 1100lm | PUS1-9272515F-WB | | | | | | |
| | | | | | | 30° | 1400lm | 1100lm | PUS1-9273015F-WB | | | | | | |
| | | | | | | 3000K | 15° | 1500lm | 1200lm | PUS1-9301515F-WB | | | | | |
| | | | | | | | 25° | 1500lm | 1200lm | PUS1-9302515F-WB | | | | | |
| | | | | | | | 30° | 1500lm | 1200lm | PUS1-9303015F-WB | | | | | |
| | | | | | | 4000K | 15° | 1600lm | 1300lm | PUS1-9401515F-WB | | | | | |
| | | | | | | | 25° | 1600lm | 1300lm | PUS1-9402515F-WB | | | | | |
| | | | | | | | 30° | 1600lm | 1300lm | PUS1-9403015F-WB | | | | | |
| | | | | | | 18 W | 21 W | 36 V | 500 mA | 90 | 2700K | 15° | 1900lm | 1500lm | PUS2-9271521F-WB |
| | | | | | | | | | | | | 25° | 1900lm | 1500lm | PUS2-9272521F-WB |
| | | | | | | | | | | | | 30° | 1900lm | 1500lm | PUS2-9273021F-WB |
| 3000K | 15° | 2000lm | 1600lm | PUS2-9301521F-WB | | | | | | | | | | | |
| | 25° | 2000lm | 1600lm | PUS2-9302521F-WB | | | | | | | | | | | |
| | 30° | 2000lm | 1600lm | PUS2-9303021F-WB | | | | | | | | | | | |
| 4000K | 15° | 2100lm | 1700lm | PUS2-9401521F-WB | | | | | | | | | | | |
| | 25° | 2100lm | 1700lm | PUS2-9402521F-WB | | | | | | | | | | | |
| | 30° | 2100lm | 1700lm | PUS2-9403021F-WB | | | | | | | | | | | |
| 13 W | 15 W | 36 V | 350 mA | 90 | 2700K | | | | | | | 15° | 1400lm | 1100lm | PUS1-9271515F-BB |
| | | | | | | | | | | | | 25° | 1400lm | 1100lm | PUS1-9272515F-BB |
| | | | | | | | | | | | | 30° | 1400lm | 1100lm | PUS1-9273015F-BB |
| | | | | | | 3000K | 15° | 1500lm | 1200lm | PUS1-9301515F-BB | | | | | |
| | | | | | | | 25° | 1500lm | 1200lm | PUS1-9302515F-BB | | | | | |
| | | | | | | | 30° | 1500lm | 1200lm | PUS1-9303015F-BB | | | | | |
| | | | | | | 4000K | 15° | 1600lm | 1300lm | PUS1-9401515F-BB | | | | | |
| | | | | | | | 25° | 1600lm | 1300lm | PUS1-9402515F-BB | | | | | |
| | | | | | | | 30° | 1600lm | 1300lm | PUS1-9403015F-BB | | | | | |
| | | | | | | 18 W | 21 W | 36 V | 500 mA | 90 | 2700K | 15° | 1900lm | 1500lm | PUS2-9271521F-BB |
| | | | | | | | | | | | | 25° | 1900lm | 1500lm | PUS2-9272521F-BB |
| | | | | | | | | | | | | 30° | 1900lm | 1500lm | PUS2-9273021F-BB |
| 3000K | 15° | 2000lm | 1600lm | PUS2-9301521F-BB | | | | | | | | | | | |
| | 25° | 2000lm | 1600lm | PUS2-9302521F-BB | | | | | | | | | | | |
| | 30° | 2000lm | 1600lm | PUS2-9303021F-BB | | | | | | | | | | | |
| 4000K | 15° | 2100lm | 1700lm | PUS2-9401521F-BB | | | | | | | | | | | |
| | 25° | 2100lm | 1700lm | PUS2-9402521F-BB | | | | | | | | | | | |
| | 30° | 2100lm | 1700lm | PUS2-9403021F-BB | | | | | | | | | | | |

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory




Code for PUS1-930 1515F-WB with Honeycomb
PUS1-930 1515F-WB H

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System.

21W 15W CRI90 2700K 3000K 4000K 15° 25° 30° CITIZEN 60,000h@L80B10 GLOBAL UGR < 19 IP20 DALI CB CE



| LED Power | System Power | LED Voltage | LED Current | CRI | CCT | Beam | LED Output | System Output | Code | | | | | | |
|-----------|--------------|-------------|-------------|------------------|-------|-------|------------|---------------|------------------|------------------|-------|-----|--------|--------|------------------|
| 13 W | 15 W | 36 V | 350 mA | 90 | 2700K | 15° | 1400lm | 1100lm | PUS1-9271515D-WB | | | | | | |
| | | | | | | 25° | 1400lm | 1100lm | PUS1-9272515D-WB | | | | | | |
| | | | | | | 30° | 1400lm | 1100lm | PUS1-9273015D-WB | | | | | | |
| | | | | | | 3000K | 15° | 1500lm | 1200lm | PUS1-9301515D-WB | | | | | |
| | | | | | | | 25° | 1500lm | 1200lm | PUS1-9302515D-WB | | | | | |
| | | | | | | | 30° | 1500lm | 1200lm | PUS1-9303015D-WB | | | | | |
| | | | | | | 4000K | 15° | 1600lm | 1300lm | PUS1-9401515D-WB | | | | | |
| | | | | | | | 25° | 1600lm | 1300lm | PUS1-9402515D-WB | | | | | |
| | | | | | | | 30° | 1600lm | 1300lm | PUS1-9403015D-WB | | | | | |
| | | | | | | 18 W | 21 W | 36 V | 500 mA | 90 | 2700K | 15° | 1900lm | 1500lm | PUS2-9271521D-WB |
| | | | | | | | | | | | | 25° | 1900lm | 1500lm | PUS2-9272521D-WB |
| | | | | | | | | | | | | 30° | 1900lm | 1500lm | PUS2-9273021D-WB |
| 3000K | 15° | 2000lm | 1600lm | PUS2-9301521D-WB | | | | | | | | | | | |
| | 25° | 2000lm | 1600lm | PUS2-9302521D-WB | | | | | | | | | | | |
| | 30° | 2000lm | 1600lm | PUS2-9303021D-WB | | | | | | | | | | | |
| 4000K | 15° | 2100lm | 1700lm | PUS2-9401521D-WB | | | | | | | | | | | |
| | 25° | 2100lm | 1700lm | PUS2-9402521D-WB | | | | | | | | | | | |
| | 30° | 2100lm | 1700lm | PUS2-9403021D-WB | | | | | | | | | | | |
| 13 W | 15 W | 36 V | 350 mA | 90 | 2700K | | | | | | | 15° | 1400lm | 1100lm | PUS1-9271515D-BB |
| | | | | | | | | | | | | 25° | 1400lm | 1100lm | PUS1-9272515D-BB |
| | | | | | | | | | | | | 30° | 1400lm | 1100lm | PUS1-9273015D-BB |
| | | | | | | 3000K | 15° | 1500lm | 1200lm | PUS1-9301515D-BB | | | | | |
| | | | | | | | 25° | 1500lm | 1200lm | PUS1-9302515D-BB | | | | | |
| | | | | | | | 30° | 1500lm | 1200lm | PUS1-9303015D-BB | | | | | |
| | | | | | | 4000K | 15° | 1600lm | 1300lm | PUS1-9401515D-BB | | | | | |
| | | | | | | | 25° | 1600lm | 1300lm | PUS1-9402515D-BB | | | | | |
| | | | | | | | 30° | 1600lm | 1300lm | PUS1-9403015D-BB | | | | | |
| | | | | | | 18 W | 21 W | 36 V | 500 mA | 90 | 2700K | 15° | 1900lm | 1500lm | PUS2-9271521D-BB |
| | | | | | | | | | | | | 25° | 1900lm | 1500lm | PUS2-9272521D-BB |
| | | | | | | | | | | | | 30° | 1900lm | 1500lm | PUS2-9273021D-BB |
| 3000K | 15° | 2000lm | 1600lm | PUS2-9301521D-BB | | | | | | | | | | | |
| | 25° | 2000lm | 1600lm | PUS2-9302521D-BB | | | | | | | | | | | |
| | 30° | 2000lm | 1600lm | PUS2-9303021D-BB | | | | | | | | | | | |
| 4000K | 15° | 2100lm | 1700lm | PUS2-9401521D-BB | | | | | | | | | | | |
| | 25° | 2100lm | 1700lm | PUS2-9402521D-BB | | | | | | | | | | | |
| | 30° | 2100lm | 1700lm | PUS2-9403021D-BB | | | | | | | | | | | |

Code Remark: D=(DALI Dim)

Optional accessory





Code for PUS1-930 1515D-WB with Honeycomb
PUS1-930 1515D-WB H

Track System



Compatible with GLOBAL 3-Circuit Track System.

NEKO / PURE M
LED Tracklight



| LED Power | System Power | LED Voltage | LED Current | CRI | CCT | Beam | LED Output | System Output | Code | |
|-----------|--------------|-------------|-------------|-----|-------|-------|------------|---------------|------------------|------------------|
| 25 W | 28 W | 36 V | 700 mA | 90 | 2700K | 18° | 3200lm | 2500lm | PUM1-9271828F-WB | |
| | | | | | | 30° | 3200lm | 2500lm | PUM1-9273028F-WB | |
| | | | | | | 45° | 3200lm | 2500lm | PUM1-9274528F-WB | |
| | | | | | | 3000K | 18° | 3400lm | 2700lm | PUM1-9301828F-WB |
| | | | | | | | 30° | 3400lm | 2700lm | PUM1-9303028F-WB |
| | | | | | | | 45° | 3400lm | 2700lm | PUM1-9304528F-WB |
| | | | | | | 4000K | 18° | 3600lm | 2900lm | PUM1-9401828F-WB |
| | | | | | | | 30° | 3600lm | 2900lm | PUM1-9403028F-WB |
| | | | | | | | 45° | 3600lm | 2900lm | PUM1-9404528F-WB |

| LED Power | System Power | LED Voltage | LED Current | CRI | CCT | Beam | LED Output | System Output | Code | |
|-----------|--------------|-------------|-------------|-----|-------|-------|------------|---------------|------------------|------------------|
| 25 W | 28 W | 36 V | 700 mA | 90 | 2700K | 18° | 3200lm | 2500lm | PUM1-9271828F-BB | |
| | | | | | | 30° | 3200lm | 2500lm | PUM1-9273028F-BB | |
| | | | | | | 45° | 3200lm | 2500lm | PUM1-9274528F-BB | |
| | | | | | | 3000K | 18° | 3400lm | 2700lm | PUM1-9301828F-BB |
| | | | | | | | 30° | 3400lm | 2700lm | PUM1-9303028F-BB |
| | | | | | | | 45° | 3400lm | 2700lm | PUM1-9304528F-BB |
| | | | | | | 4000K | 18° | 3600lm | 2900lm | PUM1-9401828F-BB |
| | | | | | | | 30° | 3600lm | 2900lm | PUM1-9403028F-BB |
| | | | | | | | 45° | 3600lm | 2900lm | PUM1-9404528F-BB |

Code Remark: F=(ON-OFF)

Optional accessory



Code for PUM1-930 1828F-WB with Honeycomb
PUM1-930 1828F-WB H

Honeycomb

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System



| LED Power | System Power | LED Voltage | LED Current | CRI | CCT | Beam | LED Output | System Output | Code | |
|-----------|--------------|-------------|-------------|-----|-------|-------|------------|---------------|------------------|------------------|
| 25 W | 28 W | 36 V | 700 mA | 90 | 2700K | 18° | 3200lm | 2500lm | PUM1-9271828D-WB | |
| | | | | | | 30° | 3200lm | 2500lm | PUM1-9273028D-WB | |
| | | | | | | 45° | 3200lm | 2500lm | PUM1-9274528D-WB | |
| | | | | | | 3000K | 18° | 3400lm | 2700lm | PUM1-9301828D-WB |
| | | | | | | | 30° | 3400lm | 2700lm | PUM1-9303028D-WB |
| | | | | | | | 45° | 3400lm | 2700lm | PUM1-9304528D-WB |
| | | | | | | 4000K | 18° | 3600lm | 2900lm | PUM1-9401828D-WB |
| | | | | | | | 30° | 3600lm | 2900lm | PUM1-9403028D-WB |
| | | | | | | | 45° | 3600lm | 2900lm | PUM1-9404528D-WB |

| LED Power | System Power | LED Voltage | LED Current | CRI | CCT | Beam | LED Output | System Output | Code | |
|-----------|--------------|-------------|-------------|-----|-------|-------|------------|---------------|------------------|------------------|
| 25 W | 28 W | 36 V | 700 mA | 90 | 2700K | 18° | 3200lm | 2500lm | PUM1-9271828D-BB | |
| | | | | | | 30° | 3200lm | 2500lm | PUM1-9273028D-BB | |
| | | | | | | 45° | 3200lm | 2500lm | PUM1-9274528D-BB | |
| | | | | | | 3000K | 18° | 3400lm | 2700lm | PUM1-9301828D-BB |
| | | | | | | | 30° | 3400lm | 2700lm | PUM1-9303028D-BB |
| | | | | | | | 45° | 3400lm | 2700lm | PUM1-9304528D-BB |
| | | | | | | 4000K | 18° | 3600lm | 2900lm | PUM1-9401828D-BB |
| | | | | | | | 30° | 3600lm | 2900lm | PUM1-9403028D-BB |
| | | | | | | | 45° | 3600lm | 2900lm | PUM1-9404528D-BB |

Code Remark: D=(DALI Dim)

Optional accessory



Code for PUM1-930 1828D-WB with Honeycomb
PUM1-930 1828D-WB H

Honeycomb

Track System



Compatible with GLOBAL 3-Circuit Track System