

GAME & SUGAR

The high-efficiency modern ceiling light series.

GAME: A classical flat design, available in white and black.

SUGAR: A decorative recessed frame design, available in white-gold and black-gold.

- Featuring a top-level micro-prismatic cover to enhance visual comfort (UGR<19) combined with homogeneous lighting.
- Four housing diameters available: Ø350, Ø450, Ø600, Ø900.
- Can be surface-mounted onto the ceiling, or pendant through wire or rod.
- An indirect light module is available as an option, easily mounted onto the luminaire.
- Light color temperature options: 3000K, 4000K, or Tunable White.
- Lumen efficiency up to 140 lm/W.
- Well-suited for offices, meeting rooms, schools, shops, and more



GAME

SUGAR

Microprismatic Cover



UGR<19

Up to 140lm/w



Magnetic Uplight Module

UPLIGHT

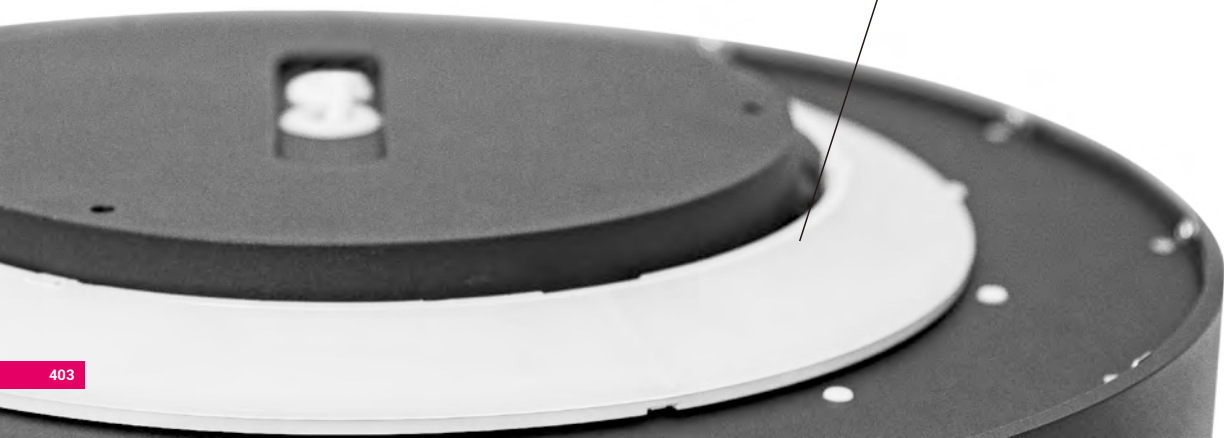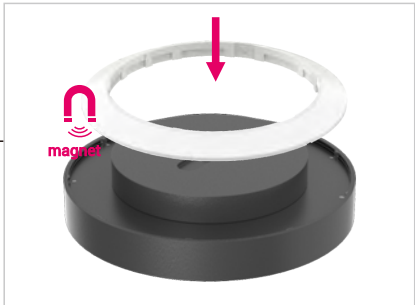


8W Up Light(250mA) 950lm
12W Down Light(350mA) 1800lm
16W Down Light(500mA) 2350lm
ON-OFF/Phase Dim/1-10V/DALI Dim

50mm



350mm

75mm



350mm



11W Up Light(350mA) 1200lm
16W Down Light(500mA) 2500lm
24W Down Light(700mA) 3400lm
ON-OFF/Phase Dim/1-10V/DALI Dim

50mm



450mm

75mm



450mm



18W Up Light(500mA) 1800lm
24W Down Light(700mA) 3300lm
36W Down Light(1050mA) 5300lm
46W Down Light(1400mA) 6700lm
ON-OFF/Phase Dim/1-10V/DALI Dim

50mm



600mm

75mm



600mm



25W Up Light(700mA) 2700lm
65W Down Light(1400mA) 8700lm
ON-OFF/1-10V/DALI Dim

50mm



900mm

75mm





900mm

GAME

D1:GAME 350: D1=Ø350mm
GAME 450: D1=Ø450mm
GAME 600: D1=Ø600mm
GAME 900: D1=Ø900mm

D2:GAME 350/ 450: D2=Ø235mm
GAME 600/ 900: D2=Ø350mm

D3:Ø136mm

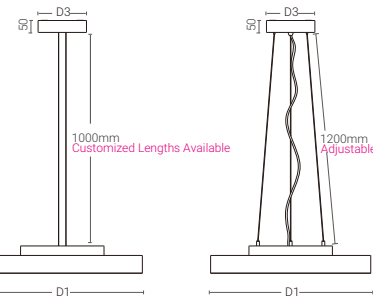


SUGAR

D1:SUGAR 350: D1=Ø350mm
SUGAR 450: D1=Ø450mm
SUGAR 600: D1=Ø600mm
SUGAR 900: D1=Ø900mm

D2: SUGAR 350/ 450: D2=Ø235mm
SUGAR 600/ 900: D2=Ø350mm

D3:Ø136mm

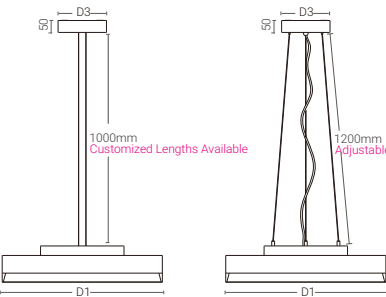

GAME – Ceiling Light System

Project: Skyline Hill, Germany





Project: EWO Administration Building, German



Project: Kindergarten Oftringen, Switzerland


GAME 350 – Ceiling Light System



Quick Info

- LED: 12W, 16W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim


Light Distribution

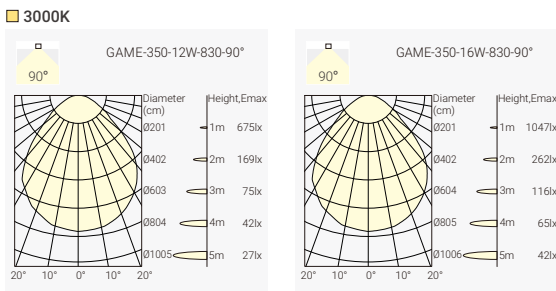

Finish



Optional Uplight Module



Order Info (Surface/ Wall Mounted GAME 350 in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	80	2700K	90°	2000lm	1600lm	G3SM-8279012N-BN
					3000K	90°	2100lm	1700lm	G3SM-8309012N-BN
					4000K	90°	2300lm	1800lm	G3SM-8409012N-BN
					2700K-6500K	90°	Max.2100lm	Max.1750lm	G3SM-8T29012N-BN
16W	18W	34V	500mA	80	2700K	90°	2500lm	2000lm	G3SM-8279016N-BN
					3000K	90°	2700lm	2150lm	G3SM-8309016N-BN
					4000K	90°	2900lm	2350lm	G3SM-8409016N-BN
					2700K-6500K	90°	Max.2900lm	Max.2500lm	G3SM-8T29012N-BN
Uplight Module									
8W	10W	33V	250mA	80	2700K	110°	950lm	850lm	UM35-827A108N-NN
					3000K	110°	1000lm	900lm	UM35-830A108N-NN
					4000K	110°	1100lm	950lm	UM35-840A108N-NN
Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)									

Coding

G3SM	-	***	**	**	*	-	*	*	-	*
Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory			
G3SM	827	90	12	N	W	N	U			
GAME 350 Surface/ Wall Mounted	CRI80/ 2700K	90°	12W	No Driver	White	None	Uplight Module			
	830		16	F	B					
	CRI80/ 3000K		16W	On-Off	Black					
G3PW	840			P						
GAME 350 Pendant Wires	CRI80/ 4000K			Phase Dim						
G3PR	8T2			A						
GAME 350 Pendant Rod	CRI80 2700K-6500K Tunable White			1-10V Dim						
	927			D						
	CRI90/ 2700K			DALI Dim						
	930									
	CRI90/ 3000K									
	940									
	CRI90/ 4000K									
	9T2									
	CRI90 2700K-6500K Tunable White									


GAME 450 – Ceiling Light System



Quick Info

- LED: 16W, 24W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 3400lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim


Light Distribution

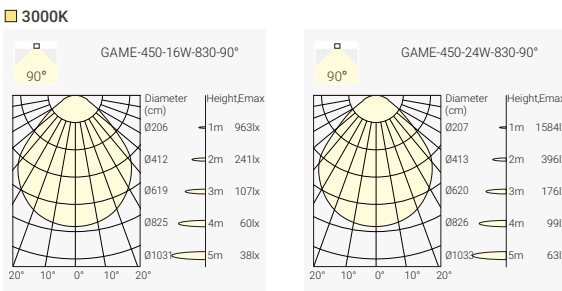

Finish



Optional Uplight Module



Order Info (Surface/ Wall Mounted GAME 450 in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	34V	500mA	80	2700K	90°	2500lm	2150lm	G4SM-8279016N-BN
					3000K	90°	2700lm	2300lm	G4SM-8309016N-BN
					4000K	90°	2900lm	2500lm	G4SM-8409016N-BN
					2700K-6500K	90°	Max.2900lm	Max.2300lm	G4SM-8T09016N-BN
24W	26W	34V	700mA	80	2700K	90°	3500lm	3000lm	G4SM-8279024N-BN
					3000K	90°	3700lm	3150lm	G4SM-8309024N-BN
					4000K	90°	4000lm	3400lm	G4SM-8409024N-BN
					2700K-6500K	90°	Max.4100lm	Max.3200lm	G4SM-8T29024N-BN
Uplight Module									
11W	13W	33V	350mA	80	2700K	110°	1100lm	1000lm	UM45-827A111N-NN
					3000K	110°	1200lm	1100lm	UM45-830A111N-NN
					4000K	110°	1300lm	1200lm	UM45-840A111N-NN
Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)									

Coding

G4SM	***	**	**	*	- *	*	- *
Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
G4SM GAME 450 Surface/ Wall Mounted	827 CRI80/ 2700K	90 90°	16 16W	N No Driver	W White	N None	U Uplight Module
	830 CRI80/ 3000K		24 24W	F On-Off	B Black		
G4PW GAME 450 Pendant Wires	840 CRI80/ 4000K			P Phase Dim			
	8T2 CRI80 2700K-6500K Tunable White			A 1-10V Dim			
G4PR GAME 450 Pendant Rod	927 CRI90/ 2700K			D DALI Dim			
	930 CRI90/ 3000K						
	940 CRI90/ 4000K						
	9T2 CRI90 2700K-6500K Tunable White						


GAME 600 – Ceiling Light System



Quick Info

- LED: 24W, 36W, 46W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 6700lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

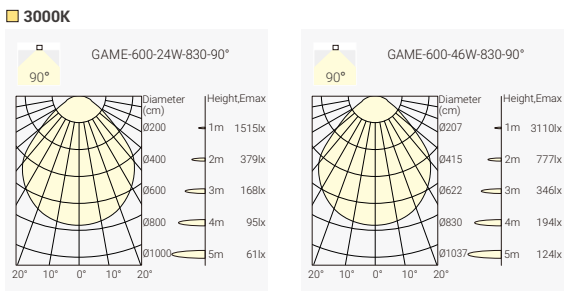


Finish



Pendant Wires Mounted
* Standard pendant Wires length: 1200mm



Optional Uplight Module



Order Info (Surface/ Wall Mounted GAME 600 in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	34V	700mA	80	2700K	90°	3500lm	2850lm	G6SM-8279024N-BN
					3000K	90°	3700lm	3000lm	G6SM-8309024N-BN
					4000K	90°	4000lm	3300lm	G6SM-8409024N-BN
					2700K-6500K	90°	Max.4100lm	Max.3400lm	G6SM-8T29024N-BN
36W	40W	34V	1050mA	80	2700K	90°	5800lm	4750lm	G6SM-8279036N-BN
					3000K	90°	6200lm	5000lm	G6SM-8309036N-BN
					4000K	90°	6600lm	5300lm	G6SM-8409036N-BN
					2700K-6500K	90°	Max.6600lm	Max.5700lm	G6SM-8T29036N-BN
46W	50W	34V	1400mA	80	2700K	90°	7200lm	5850lm	G6SM-8279046N-BN
					3000K	90°	8100lm	6150lm	G6SM-8309046N-BN
					4000K	90°	8600lm	6700lm	G6SM-8409046N-BN
18W	20W	36V	500mA	80	2700K	110°	1800lm	1600lm	UM60-827A118N-NN
					3000K	110°	1900lm	1700lm	UM60-830A118N-NN
					4000K	110°	2000lm	1800lm	UM60-840A118N-NN

Coding

G6SM	-	***	**	**	*	-	*	*	-	*
Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory			
G6SM GAME 600 Surface/ Wall Mounted	827 CRI80/ 2700K	90 90°	24 24W	N No Driver	W White	N None	U Uplight Module			
	830 CRI80/ 3000K		36 36W	F On-Off	B Black					
G6PW GAME 600 Pendant Wires	840 CRI80/ 4000K		46 46W *	P Phase Dim						
	8T2 CRI80 2700K-6500K Tunable White			A 1-10V Dim						
G6PR GAME 600 Pendant Rod	927 CRI90/ 2700K			D DALI Dim						
	930 CRI90/ 3000K									
	940 CRI90/ 4000K									
	9T2 CRI90 2700K-6500K Tunable White									

* LED 46W is not available with Tunable White


GAME 900 – Ceiling Light System



Quick Info

- LED: 60W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 90°
- Lumen Output: Up to 8700lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, 1-10V Dim, DALI Dim


Light Distribution




Finish



Pendant Wires Mounted
* Standard pendant Wires length: 1200mm

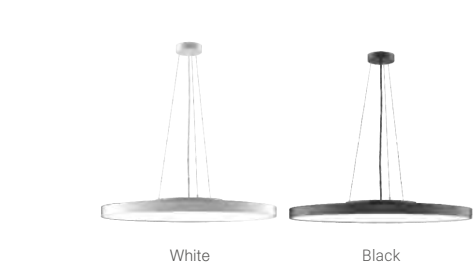

Optional Uplight Module



Order Info (Surface/ Wall Mounted GAME 900 in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
60W	62W	43V	1400mA	80	2700K	90°	9900lm	7500lm	G9SM-8279060N-BN
					3000K	90°	10500lm	7900lm	G9SM-8309060N-BN
					4000K	90°	11000lm	8700lm	G9SM-8409060N-BN
25W	28W	36V	700mA	80	2700K	110°	2900lm	2500lm	UM90-827A128N-NN
					3000K	110°	3100lm	2700lm	UM90-830A128N-NN
					4000K	110°	3300lm	2950lm	UM90-840A128N-NN

Coding

G9SM	-	***	**	**	*	-	*	*	-	*
Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory			
G9SM GAME 900 Surface/ Wall Mounted	827 CRI80/ 2700K	90 90°	60 60W	N No Driver	W White	N None	U Uplight Module			
G94PW GAME 900 Pendant Wires	830 CRI80/ 3000K			F On-Off	B Black					
G94PR GAME 900 Pendant Rod	840 CRI80/ 4000K			A 1-10V Dim						
	927 CRI90/ 2700K			D DALI Dim						
	930 CRI90/ 3000K									
	940 CRI90/ 4000K									



Project: Corporate Office Project, Panama



Project: Office Tensio Trondheim, Norway




SUGAR 350 – Ceiling Light System





Quick Info

- LED: 12W, 16W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution



3000K



Finish

Surface/ Wall Mounted



Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Optional Uplight Module



Magnetic Uplight Module 350

Code for S3SM-8309012N-BG with Uplight Module
S3SM-8309012N-BG-U

Order Info (Surface/ Wall Mounted SUGAR 350 in Black -Gold Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	80	2700K	90°	2000lm	1600lm	S3SM-8279012N-BG
					3000K	90°	2100lm	1700lm	S3SM-8309012N-BG
					4000K	90°	2300lm	1800lm	S3SM-8409012N-BG
					2700K-6500K	90°	Max.2100lm	Max.1750lm	S3SM-8T29012N-BG
16W	18W	34V	500mA	80	2700K	90°	2500lm	2000lm	S3SM-8279016N-BG
					3000K	90°	2700lm	2150lm	S3SM-8309016N-BG
					4000K	90°	2900lm	2350lm	S3SM-8409016N-BG
					2700K-6500K	90°	Max.2900lm	Max.2500lm	S3SM-8T29016N-BG
Uplight Module									
8W	10W	33V	250mA	80	2700K	110°	950lm	850lm	UM35-827A108N-NN
					3000K	110°	1000lm	900lm	UM35-830A108N-NN
					4000K	110°	1100lm	950lm	UM35-840A108N-NN
Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)									

Coding

S3SM	- ***	**	**	*	- **	- *
Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Accessory
S3SM	827	90	12	N	WW	U
SUGAR 350 Surface/ Wall Mounted	CR180/ 2700K	90°	12W	No Driver	White-White	Uplight Module
	830		16	F	BB	
	CR180/ 3000K		16W	On-Off	Black-Black	
S3PW	840			P	BG	
SUGAR 350 Pendant Wires	CR180/ 4000K			Phase Dim	Black-Gold	
S3PR	8T2			A	WG	
SUGAR 350 Pendant Rod	CR180 2700K-6500K Tunable White			1-10V Dim	White-Gold (Optional)	
	927			D		
	CR190/ 2700K			DALI Dim		
	930					
	CR190/ 3000K					
	940					
	CR190/ 4000K					
	9T2					
	CR190 2700K-6500K Tunable White					


SUGAR 450 – Ceiling Light System





Quick Info

- LED: 16W, 24W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 3400lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution



3000K



Finish

Surface/ Wall Mounted



Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Optional Uplight Module



Magnetic Uplight Module 450

Code for S4SM-8309016N-WN with Uplight Module
S4SM-8309016N-WN-U

Order Info (Surface/ Wall Mounted SUGAR 450 in Black -Gold Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	34V	500mA	80	2700K	90°	2400lm	2150lm	S4SM-8279016N-BG
					3000K	90°	2600lm	2300lm	S4SM-8309016N-BG
					4000K	90°	2800lm	2500lm	S4SM-8409016N-BG
					2700K-6500K	90°	Max.2900lm	Max.2300lm	S4SM-8T29016N-BG
24W	26W	34V	700mA	80	2700K	90°	3500lm	3000lm	S4SM-8279024N-BG
					3000K	90°	3700lm	3150lm	S4SM-8309024N-BG
					4000K	90°	4000lm	3400lm	S4SM-8409024N-BG
					2700K-6500K	90°	Max.4100lm	Max.3200lm	S4SM-8T29024N-BG
Uplight Module									
11W	13W	33V	350mA	80	2700K	110°	1100lm	1000lm	UM45-827A111N-NN
					3000K	110°	1200lm	1100lm	UM45-830A111N-NN
					4000K	110°	1300lm	1200lm	UM45-840A111N-NN
Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)									

Coding

G4SM	- ***	**	**	*	**	- *
Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Accessory
G4SM	827	90	16	N	WW	U
SUGAR 450 Surface/ Wall Mounted	CR180/ 2700K	90°	16W	No Driver	White-White	Uplight Module
	830		24	F	BB	
	CR180/ 3000K		24W	On-Off	Black-Black	
G34PW	840			P	BG	
SUGAR 450 Pendant Wires	CR180/ 4000K			Phase Dim	Black-Gold	
G34PR	8T2			A	WG	
SUGAR 450 Pendant Rod	CR180 2700K-6500K Tunable White			1-10V Dim	White-Gold (Optional)	
	927			D		
	CR190/ 2700K			DALI Dim		
	930					
	CR190/ 3000K					
	940					
	CR190/ 4000K					
	9T2					
	CR190 2700K-6500K Tunable White					



SUGAR 600 – Ceiling Light System



Quick Info

- LED: 24W, 36W, 46W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 6700lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim


Light Distribution

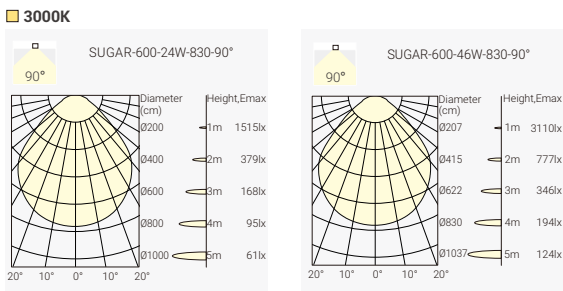

Finish



Optional Uplight Module

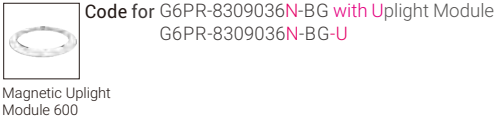

Order Info (Surface/ Wall Mounted SUGAR 600 in Black -Gold Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	34V	700mA	80	2700K	90°	3500lm	2850lm	S6SM-8279024N-BG
					3000K	90°	3700lm	3000lm	S6SM-8309024N-BG
					4000K	90°	4000lm	3300lm	S6SM-8409024N-BG
					2700K-6500K	90°	Max.4100lm	Max.3400lm	S6SM-8T29024N-BG
36W	40W	34V	1050mA	80	2700K	90°	5800lm	4750lm	S6SM-8279036N-BG
					3000K	90°	6200lm	5000lm	S6SM-8309036N-BG
					4000K	90°	6600lm	5300lm	S6SM-8409036N-BG
					2700K-6500K	90°	Max.6600lm	Max.5700lm	S6SM-8T29036N-BG
46W	50W	34V	1400mA	80	2700K	90°	7200lm	5850lm	S6SM-8279046N-BG
					3000K	90°	8100lm	6150lm	S6SM-8309046N-BG
					4000K	90°	8600lm	6700lm	S6SM-8409046N-BG
Uplight Module									
18W	20W	36V	500mA	80	2700K	110°	1800lm	1600lm	UM60-827A118N-NN
					3000K	110°	1900lm	1700lm	UM60-830A118N-NN
					4000K	110°	2000lm	1800lm	UM60-840A118N-NN
Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)									

Coding

S6SM	-	***	**	**	*	-	**	-	*
Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Accessory			
G6SM	827	90	24	N	WW	U			
SUGAR 600 Surface/ Wall Mounted	CRI80/ 2700K	90°	24W	No Driver	White-White	Uplight Module			
	830		36	F	BB				
	CRI80/ 3000K		36W	On-Off	Black-Black				
G6PW	840		46	P	BG				
SUGAR 600 Pendant Wires	CRI80/ 4000K		46W *	Phase Dim	Black-Gold				
	8T2								
G6PR	CRI80			A	WG				
SUGAR 600 Pendant Rod	2700K-6500K Tunable White			1-10V Dim	White-Gold (Optional)				
	927			D					
	CRI90/ 2700K			DALI Dim					
	930								
	CRI90/ 3000K								
	940								
	CRI90/ 4000K								
	9T2								
	CRI90								
	2700K-6500K Tunable White								

* LED 46W is not available with Tunable White



SUGAR 900 – Ceiling Light System



Quick Info

- LED: 60W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 90°
- Lumen Output: Up to 8700lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, 1-10V Dim, DALI Dim


Light Distribution



Finish



Optional Uplight Module

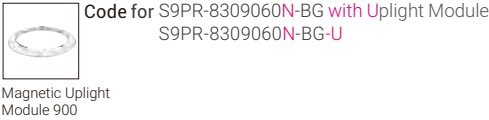

Order Info (Surface/ Wall Mounted SUGAR 900 in Black -Gold Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
60W	62W	43V	1400mA	80	2700K	90°	9900lm	7500lm	S9SM-8279060N-BG
					3000K	90°	10500lm	7900lm	S9SM-8309060N-BG
					4000K	90°	11000lm	8700lm	S9SM-8409060N-BG
Uplight Module									
25W	28W	36V	700mA	80	2700K	110°	2900lm	2500lm	UM90-827A128N-NN
					3000K	110°	3100lm	2700lm	UM90-830A128N-NN
					4000K	110°	3300lm	2950lm	UM90-840A128N-NN
Code Remark: N=N(No Driver) F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)									

Coding

S9SM	-	***	**	**	*	-	**	-	*
Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Accessory			
S9SM	827	90	60	N	WW	U			
SUGAR 900 Surface/ Wall Mounted	CRI80/ 2700K	90°	60W	No Driver	White-White	Uplight Module			
	830			F	BB				
	CRI80/ 3000K			On-Off	Black-Black				
S9PW	840			A	BG				
SUGAR 900 Pendant Wires	CRI80/ 4000K			1-10V Dim	Black-Gold				
S9PR	927			D	WG				
SUGAR 900 Pendant Rod	CRI90/ 2700K			DALI Dim	White-Gold (Optional)				
	930								
	CRI90/ 3000K								
	940								
	CRI90/ 4000K								