

**NEKO / SIGN**  
Minimal LED Downlight









**SIGN**

Minimal LED Downlight

**NEKO / SIGN**  
Minimal LED Downlight

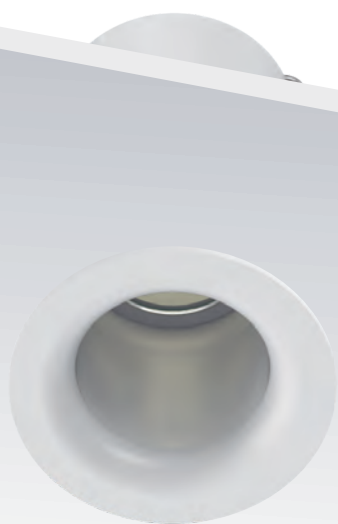

SIGN45-G



SIGN35-G

# SIGN-G

Economic Version



SIGN35-G



SIGN45-G

## Colour

---




White





Black



# NEKO / SIGN35-G

## Minimal LED Downlight



1.5W | CRI80 CRI90 | 2700K 3000K 4000K | 18° 30° | IP20 | UGR < 19 | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE | CE CB



	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
 White	1.5 W	2.5 W	3.2 V	500 mA	80	2700K	18°	140lm	100lm	S3G-8271802X-WN
						30°	140lm	100lm	S3G-8273002X-WN	
						3000K	18°	150lm	110lm	S3G-8301802X-WN
						30°	150lm	110lm	S3G-8303002X-WN	
						4000K	18°	160lm	120lm	S3G-8401802X-WN
						30°	160lm	120lm	S3G-8403002X-WN	
	90	2700K	18°	120lm	85lm	S3G-9271802X-WN				
		30°	120lm	85lm	S3G-9273002X-WN					
		3000K	18°	130lm	95lm	S3G-9301802X-WN				
		30°	130lm	95lm	S3G-9303002X-WN					
		4000K	18°	140lm	105lm	S3G-9401802X-WN				
		30°	140lm	105lm	S3G-9403002X-WN					
 Black	1.5 W	2.5 W	3.2 V	500 mA	80	2700K	18°	140lm	100lm	S3G-8271802X-BN
						30°	140lm	100lm	S3G-8273002X-BN	
						3000K	18°	150lm	110lm	S3G-8301802X-BN
						30°	150lm	110lm	S3G-8303002X-BN	
						4000K	18°	160lm	120lm	S3G-8401802X-BN
						30°	160lm	120lm	S3G-8403002X-BN	
	90	2700K	18°	120lm	85lm	S3G-9271802X-BN				
		30°	120lm	85lm	S3G-9273002X-BN					
		3000K	18°	130lm	95lm	S3G-9301802X-BN				
		30°	130lm	95lm	S3G-9303002X-BN					
		4000K	18°	140lm	105lm	S3G-9401802X-BN				
		30°	140lm	105lm	S3G-9403002X-BN					

Remark: X= F(ON-OFF) X= P(Phase Dim) X= A(1-10V Dim) X= D(DALI Dim)

### Features





· Easy for installation

**NEKO / SIGN45-G**  
Minimal LED Downlight



6W | CRI80 CRI90 | 2700K 3000K 4000K | 30° | IP20 | UGR < 19 | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | CE | CB



	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
 White	6 W	8 W	18 V	350 mA	80	2700K	30°	520lm	400lm	S4G-8273006X-WN	
						3000K	30°	550lm	420lm	S4G-8303006X-WN	
						4000K	30°	600lm	450lm	S4G-8403006X-WN	
						90	2700K	30°	450lm	350lm	S4G-9273006X-WN
						3000K	30°	480lm	370lm	S4G-9303006X-WN	
						4000K	30°	520lm	400lm	S4G-9403006X-WN	
 Black	6 W	8 W	18 V	350 mA	80	2700K	30°	520lm	400lm	S4G-8273006X-BN	
						3000K	30°	550lm	420lm	S4G-8303006X-BN	
						4000K	30°	600lm	450lm	S4G-8403006X-BN	
						90	2700K	30°	450lm	350lm	S4G-9273006X-BN
						3000K	30°	480lm	370lm	S4G-9303006X-BN	
						4000K	30°	520lm	400lm	S4G-9403006X-BN	

Remark: X= F (ON-OFF) X= P (Phase Dim) X= A (1-10V Dim) X= D (DALI Dim)

**Features**

