

# ROXY

In-track Driver LED Tracklight  
Clean Design







Project: Clever armaturval för Kv Poolen, Sweden




# ROXY – In-track Driver LED Tracklight

Project: CMS LAW FIRM, Poland






# ROXY Art – In-track Driver LED Tracklight




### Quick Info

- CITIZEN LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off



### Light Distribution

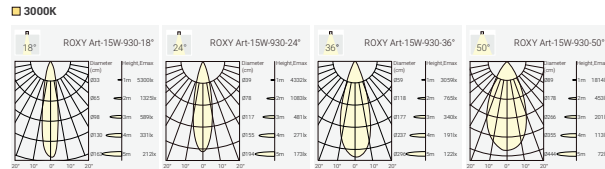

### Finish




### Order Info (ROXY Art in White Housing & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	18°	1200lm	900lm	ROA1-9271815F-WB
						24°	1200lm	900lm	ROA1-9272415F-WB
						36°	1200lm	900lm	ROA1-9273615F-WB
						50°	1200lm	900lm	ROA1-9275015F-WB
				3000K		18°	1300lm	950lm	ROA1-9301815F-WB
						24°	1300lm	950lm	ROA1-9302415F-WB
						36°	1300lm	950lm	ROA1-9303615F-WB
						50°	1300lm	950lm	ROA1-9305015F-WB
				4000K		18°	1400lm	1000lm	ROA1-9401815F-WB
						24°	1400lm	1000lm	ROA1-9402415F-WB
						36°	1400lm	1000lm	ROA1-9403615F-WB
						50°	1400lm	1000lm	ROA1-9405015F-WB

Code Remark: F=F(ON-OFF)

### Optional accessory



### Track System



### Coding


Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROA1	927	18	15	F	W	B	H
ROXY Art	CR190/2700K	18°	15W	On-Off	White	Black	Honeycomb
	930	24			B		
	CR190/3000K	24°			Black		
	940	36					
	CR190/4000K	36°					
		50					
		50°					

# ROXY Art – In-track Driver LED Tracklight




### Quick Info

- CITIZEN LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALI Dim



### Light Distribution

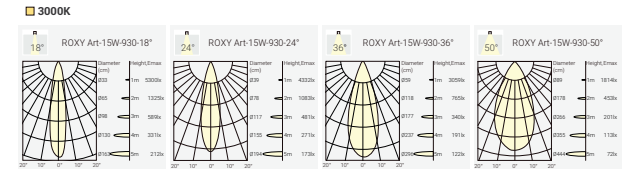

### Finish




### Order Info (ROXY Art in White Housing & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	18°	1200lm	900lm	ROA1-9271815D-WB
						24°	1200lm	900lm	ROA1-9272415D-WB
						36°	1200lm	900lm	ROA1-9273615D-WB
						50°	1200lm	900lm	ROA1-9275015D-WB
				3000K		18°	1300lm	950lm	ROA1-9301815D-WB
						24°	1300lm	950lm	ROA1-9302415D-WB
						36°	1300lm	950lm	ROA1-9303615D-WB
						50°	1300lm	950lm	ROA1-9305015D-WB
				4000K		18°	1400lm	1000lm	ROA1-9401815D-WB
						24°	1400lm	1000lm	ROA1-9402415D-WB
						36°	1400lm	1000lm	ROA1-9403615D-WB
						50°	1400lm	1000lm	ROA1-9405015D-WB

Code Remark: D=D(DALI Dim)

### Optional accessory




### Track System



### Coding


Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROA1	927	18	15	D	W	B	H
ROXY Art	CR190/2700K	18°	15W	DALI Dim	White	Black	Honeycomb
	930	24			B		
	CR190/3000K	24°			Black		
	940	36					
	CR190/4000K	36°					
		50					
		50°					

# ROXY S – In-track Driver LED Tracklight




## Quick Info


- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off



## Light Distribution

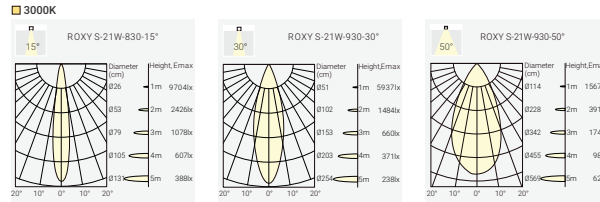

## Finish



## Order Info (ROXY S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
13W	15W	36V	250mA	90	2700K	15°	1400lm	1100lm	ROS1-9271515F-WB	
						30°	1400lm	1100lm	ROS1-9273015F-WB	
						50°	1400lm	850lm	ROS1-9275015F-WB	
						3000K	15°	1500lm	1200lm	ROS1-9301515F-WB
						30°	1500lm	1200lm	ROS1-9303015F-WB	
						50°	1500lm	900lm	ROS1-9305015F-WB	
						4000K	15°	1600lm	1300lm	ROS1-9401515F-WB
						30°	1600lm	1300lm	ROS1-9403015F-WB	
						50°	1600lm	1000lm	ROS1-9405015F-WB	
-----										
18W	21W	36V	500mA	90	2700K	15°	1900lm	1500lm	ROS2-9271521F-WB	
						30°	1900lm	1500lm	ROS2-9273021F-WB	
						50°	1900lm	1100lm	ROS2-9275021F-WB	
						3000K	15°	2000lm	1600lm	ROS2-9301512F-WB
						30°	2000lm	1600lm	ROS2-9303012F-WB	
						50°	2000lm	1100lm	ROS2-9305021F-WB	
						4000K	15°	2100lm	1700lm	ROS2-9401512F-WB
						30°	2100lm	1700lm	ROS2-9403012F-WB	
						50°	2100lm	1300lm	ROS2-9405021F-WB	

Code Remark: F=FF(ON-OFF)

## Optional accessory



Code for ROS1-9302515F-WB with Honeycomb  
ROS1-9302515F-WB-H

Honeycomb

## Track System



Compatible with GLOBAL / POWERGEAR  
3-Circuit Track System

## Coding


Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROS1	927	15	15	F	W	B	H
ROXY S-15W	CR190/ 2700K	15°	15W	On-Off	White	Black	Honeycomb
ROS2	930	30	21		B		
ROXY S-21W	CR190/3000K	30°	21W		Black		
	940	50					
	CR190/ 4000K	50°					

# ROXY S – In-track Driver LED Tracklight




## Quick Info

- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALI Dim



## Light Distribution

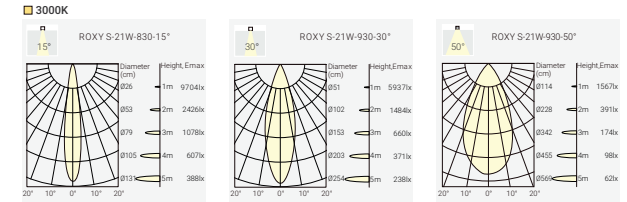

## Finish



## Order Info (ROXY S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
13W	15W	36V	250mA	90	2700K	15°	1400lm	1100lm	ROS1-9271515D-WB	
						30°	1400lm	1100lm	ROS1-9273015D-WB	
						50°	1400lm	850lm	ROS1-9275015D-WB	
						3000K	15°	1500lm	1200lm	ROS1-9301515D-WB
						30°	1500lm	1200lm	ROS1-9303015D-WB	
						50°	1500lm	900lm	ROS1-9305015D-WB	
						4000K	15°	1600lm	1300lm	ROS1-9401515D-WB
						30°	1600lm	1300lm	ROS1-9403015D-WB	
						50°	1600lm	1000lm	ROS1-9405015D-WB	
-----										
18W	21W	36V	500mA	90	2700K	15°	1900lm	1500lm	ROS2-9271521D-WB	
						30°	1900lm	1500lm	ROS2-9273021D-WB	
						50°	1900lm	1500lm	ROS2-9275021D-WB	
						3000K	15°	2000lm	1600lm	ROS2-9301512D-WB
						30°	2000lm	1600lm	ROS2-9303012D-WB	
						50°	2000lm	1500lm	ROS2-9305021D-WB	
						4000K	15°	2100lm	1700lm	ROS2-9401512D-WB
						30°	2100lm	1700lm	ROS2-9403012D-WB	
						50°	2100lm	1700lm	ROS2-9405021D-WB	

Code Remark: D=D(DALI Dim)

## Optional accessory



Code for ROS1-9302515D-WB with Honeycomb  
ROS1-9302515D-WB-H

Honeycomb

## Track System




Compatible with GLOBAL / POWERGEAR  
3-Circuit Track System

## Coding


Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROS1	927	15	15	D	W	B	H
ROXY S-15W	CR190/ 2700K	15°	15W	DALI Dim	White	Black	Honeycomb
ROS2	930	30	21		B		
ROXY S-21W	CR190/3000K	30°	21W		Black		
	940	50					
	CR190/ 4000K	50°					

# ROXY K – In-track Driver LED Tracklight




## Quick Info

- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 2600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off



## Light Distribution

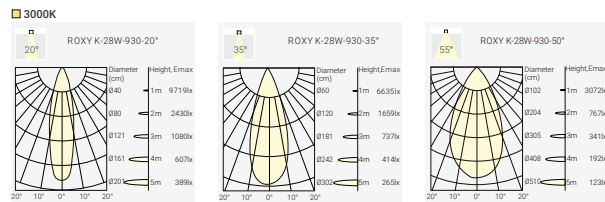

## Finish



## Order Info (ROXY K in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028F-WB
						35°	2500lm	2200lm	ROK1-9273528F-WB
						55°	2500lm	2200lm	ROK1-9275528F-WB
				3000K	15°	2700lm	2200lm	2000lm	ROK1-9302028F-WB
					35°	2700lm	2400lm	2400lm	ROK1-9303528F-WB
					55°	2700lm	2400lm	2400lm	ROK1-9305528F-WB
				4000K	20°	2900lm	2400lm	2600lm	ROK1-9402028F-WB
					35°	2900lm	2600lm	2600lm	ROK1-9403528F-WB
					55°	2900lm	2600lm	2600lm	ROK1-9405528F-WB

Code Remark: F=F(ON-OFF)

## Coding

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROK1	927	20°	28	F	W	B	H
ROXY K	CR190/2700K	20°	28W	On-Off	White	Black	Honeycomb
	930	35°			B		
	CR190/3000K	35°			Black		
	940	55°					
	CR190/4000K	55°					

## Optional accessory



Code for ROK1-9303528F-WB with Honeycomb  
ROK1-9303528F-WB-H

## Track System




Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

# ROXY K – In-track Driver LED Tracklight




## Quick Info

- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 2600lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALI Dim



## Light Distribution

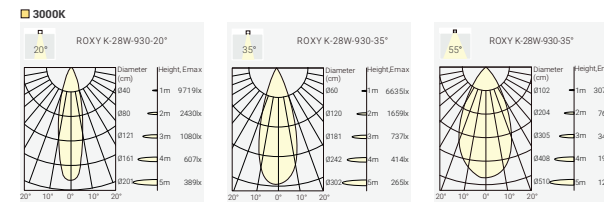

## Finish



## Order Info (ROXY K in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028D-WB
						35°	2500lm	2200lm	ROK1-9273528D-WB
						55°	2500lm	2200lm	ROK1-9275528D-WB
				3000K	15°	2700lm	2200lm	2000lm	ROK1-9302028D-WB
					35°	2700lm	2400lm	2400lm	ROK1-9303528D-WB
					55°	2700lm	2400lm	2400lm	ROK1-9305528D-WB
				4000K	20°	2900lm	2400lm	2600lm	ROK1-9402028D-WB
					35°	2900lm	2600lm	2600lm	ROK1-9403528D-WB
					55°	2900lm	2600lm	2600lm	ROK1-9405528D-WB

Code Remark: F=F(ON-OFF)

## Coding

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROK1	927	20°	28	D	W	B	H
ROXY K	CR190/2700K	20°	28W	DALI Dim	White	Black	Honeycomb
	930	35°			B		
	CR190/3000K	35°			Black		
	940	55°					
	CR190/4000K	55°					

## Optional accessory



Code for ROK1-9303528D-WB with Honeycomb  
ROK1-9303528D-WB-H

## Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

# ROXY – In-track Driver LED Tracklight

Beam Angle Zooming Version



**ROXY Art-Z**  
15W 1000lm-1200lm  
20°-35° Zooming  
35°-60° Zooming

**ROXY S-Z**  
15W 1200lm-1400lm  
21W 1600lm-1800lm  
18°-35° Zooming  
35°-60° Zooming



ZOOM



18°-60° Zooming

# ROXY Art-Z – In-track Driver LED Tracklight





### Quick Info

- CITIZEN LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°~35°, 35°~60°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALL Dim

### Light Distribution

3000K

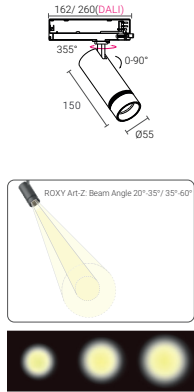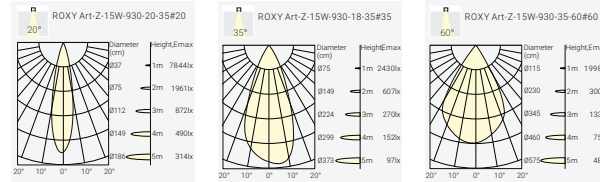

### Order Info (ROXY Art-Z in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	20°~35°	1200lm	1100lm	ROA1-927Z315F-WB
					3000K	20°~35°	1300lm	1100lm	ROA1-930Z315F-WB
					4000K	20°~35°	1400lm	1200lm	ROA1-940Z315F-WB
					2700K	35°~60°	1200lm	950lm	ROA1-927Z615F-WB
					3000K	35°~60°	1300lm	1000lm	ROA1-930Z615F-WB
					4000K	35°~60°	1400lm	1100lm	ROA1-940Z615F-WB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)


### Coding

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROA1	927	Z3	15	F	W	B	H
ROXY Art-Z	CR190/ 2700K	20°~35°	15W	On-Off	White	Black	Honeycomb
	930	Z6		D	B		
	CR190/3000K	35°~60°		DALI Dim	Black		
	940						
	CR190/ 4000K						


### Finish



### Optional accessory



### Track System



# ROXY S-Z – In-track Driver LED Tracklight





### Quick Info

- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°~35°, 35°~60°
- Lumen Output: Up to 1800lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALL Dim

### Light Distribution

3000K

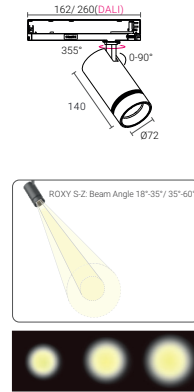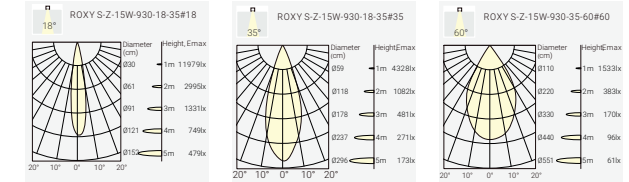

### Order Info (ROXY S-Z in White Housing & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	18°~35°	1400lm	1200lm	ROS1-927Z315F-WB
					3000K	18°~35°	1500lm	1300lm	ROS1-930Z315F-WB
					4000K	18°~35°	1600lm	1400lm	ROS1-940Z315F-WB
					2700K	35°~60°	1400lm	1100lm	ROS1-927Z615F-WB
					3000K	35°~60°	1500lm	1200lm	ROS1-930Z615F-WB
					4000K	35°~60°	1600lm	1300lm	ROS1-940Z615F-WB
18W	21W	36V	500mA	90	2700K	18°~35°	1900lm	1600lm	ROS1-927Z321F-WB
					3000K	18°~35°	2000lm	1700lm	ROS1-930Z321F-WB
					4000K	18°~35°	2100lm	1800lm	ROS1-940Z321F-WB
					2700K	35°~60°	1900lm	1500lm	ROS1-927Z621F-WB
					3000K	35°~60°	2000lm	1600lm	ROS1-930Z621F-WB
					4000K	35°~60°	2100lm	1700lm	ROS1-940Z621F-WB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)


### Finish



### Optional accessory



### Track System



### Coding

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROS1	927	Z3	15	F	W	B	H
ROXY S-Z	CR190/ 2700K	20°~35°	15W	On-Off	White	Black	Honeycomb
	930	Z6	21	D	B		
	CR190/3000K	35°~60°	21W	DALI Dim	Black		
	940						
	CR190/ 4000K						