Design: Christophe CANADELL

ECLATEC

LEIZA

SPECIFICATIONS

RoHS IP 66 IK 08

PRODUCT NAME	LEIZA
HOUSING	Die-cast aluminium LED module
BOWL	Structured in clear polycarbonate
FINISH	Polyester powder coating finish, choice of colours for the mechanical interfaces
SOURCES	LEIZA / backlighting
COLOUR TEMPERATURE	**LEIZA**: 3000K or 4000K, others on request **LEIZA backlighting**: 3000 K, others on request
OPTICAL	ORALENS
FLUX & POWER**	Up to 6864lm; 45W
ELECTRICAL CLASS	Class I or II
MOUNTING	Suspended

*Approx. 1800K
**At 3000K, in accordance with performance standards IEC 62717 and IEC 62722 (+/-5%tolerance)

SMART

- Smart-ready® (Zd4i)
- Dimming
- Detection
- WIZARD management system (pag. 420)

MECHANICAL INTERFACES

Ø27 PDG

SM

BURNER OPTION

"Red burner" effect with red PMMA accessory, other colours on request



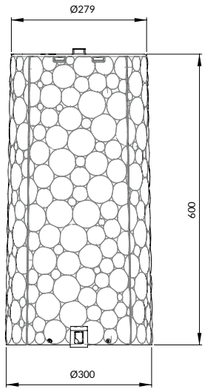

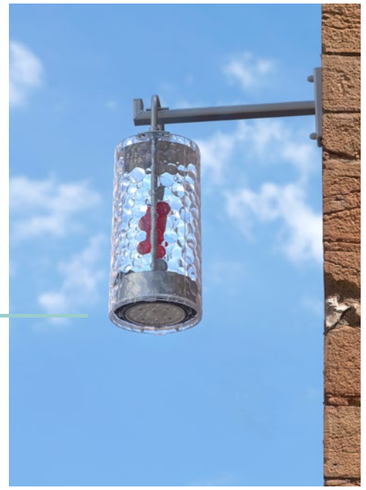

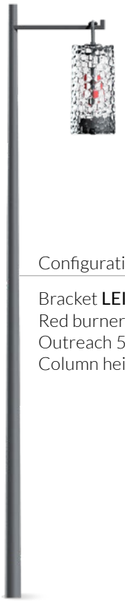

Configuration

Bracket **LEIZA**
Red burner option
Outreach 500 mm
Column height: 4m

Configuration

Bracket **LEIZA**
Outreach 500 mm
Column height: 4m

Configuration

Bracket **LEIZA**
Red burner option
Outreach 500 mm

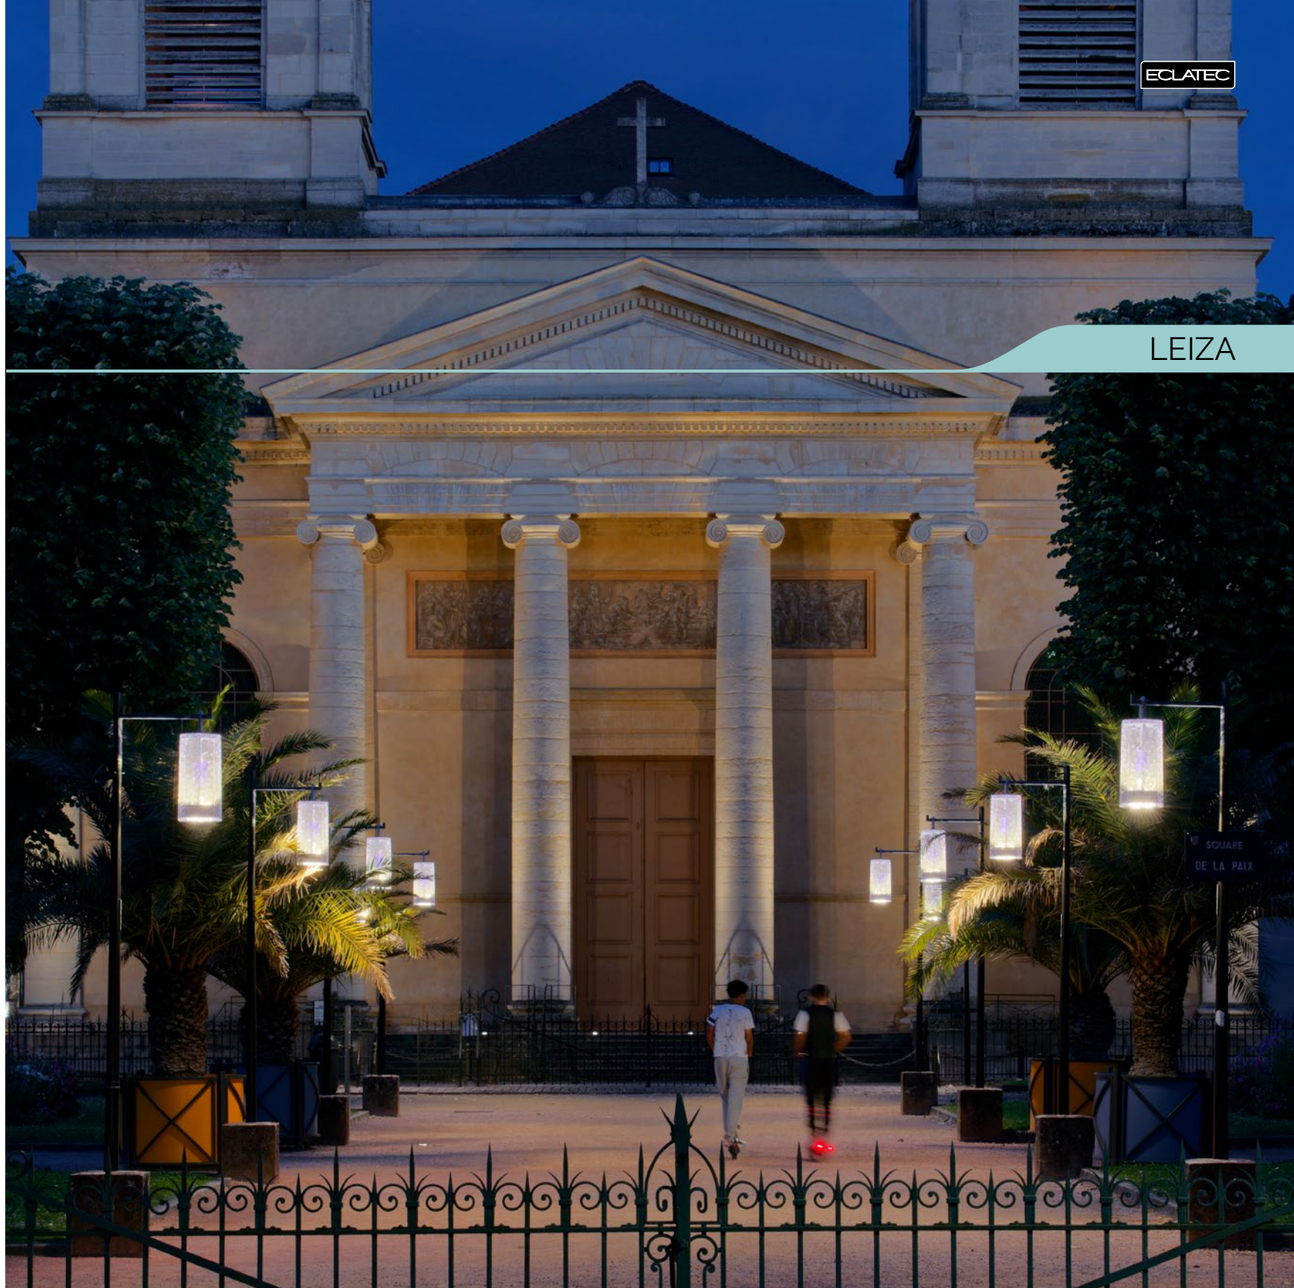

LEIZA