

**MaxiLED**  
Lighting

**MaxiPUNCH 102**



# MaxiPUNCH 102



## Key Features

- 512 DMX Controllable
- Available in Intelligent White
- Single strand runs as long as 330 ft (100m)
- IP68
- The MaxiPunch RGBW is available in 2 models.

## Description

The MaxiPunch RGBW is available in 2 models. Compact 102 and the Medium 302. This elegant design is in-keeping when installed on most building facades, It's sleek design with optional integrated mounting bracket giving full 3D rotational adjustment make it unique and a must for most applications. The choice of DMX RGBW or DMX Intelligent White, Beam angles and housing finishes allow designers worldwide to select their preferred combination.

# MaxiPUNCH 102

## Specifications

Power input: **48VAC**

Watts per unit: **4.8w**

LED Current: **200ma**

Lumens RGBW Clear Glass (Full On): **150**

Lumens Intelligent white (Full On): **250**

## Features



## Lens Options

### 15° Narrow Spot

### 25° Narrow Beam


## 40° Flood Beam

### 90° Wide Flood Beam

## Finishes



## Dimensions

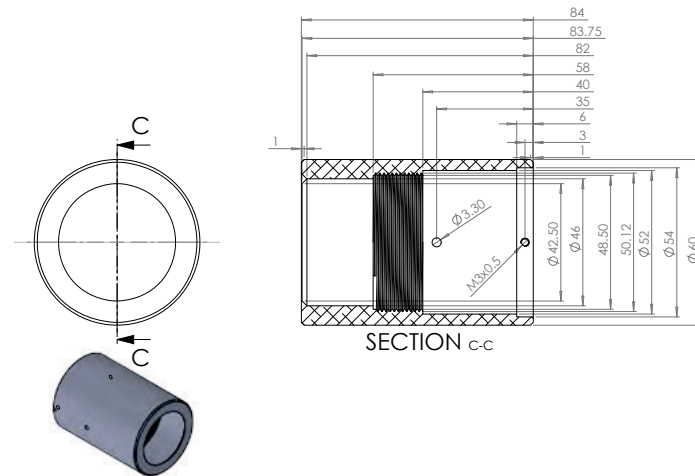

## Accessories



*Spike*



*Bracket*



Cowel



Cowel  
Angled

## Certifications



**MaxiLED**  
Lighting

# MaxiPUNCH 102



MaxiLED Lighting

Unit 2, Farrington Place, Rossendale Road Ind. Est. Burnley, Lancashire. UK. BB11 5TY  
T: +44 (0)1282 448086 E: [sales@maxiledlighting.com](mailto:sales@maxiledlighting.com) Web: [www.maxiledlighting.com](http://www.maxiledlighting.com)



**MaxiLED**  
Lighting

**MaxiPUNCH 302**



# MaxiPUNCH 302



## Key Features

- 512 DMX Controllable
- Available in Intelligent White
- Single strand runs as long as 330 ft (100m)
- IP68
- The MaxiPunch RGBW is available in 2 models.

## Description

The MaxiPunch RGBW is available in 2 models. Compact 102 and the Medium 302. This elegant design is in-keeping when installed on most building facades, It's sleek design with optional integrated mounting bracket giving full 3D rotational adjustment make it unique and a must for most applications. The choice of DMX RGBW or DMX Intelligent White, Beam angles and housing finishes allow designers worldwide to select their preferred combination.

# MaxiPUNCH 302

## Specifications

Power input: **48VAC**

Watts per unit: **14.4w**

LED Current: **200ma**

Lumens RGBW Clear Glass (Full On): **450**

Lumens Intelligent white (Full On): **750**

## Features



## Lens Options

15° Narrow Spot

25° Narrow Beam



40° Flood Beam

90° Wide Flood Beam

## Finishes



## Dimensions

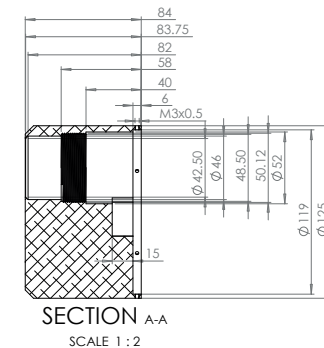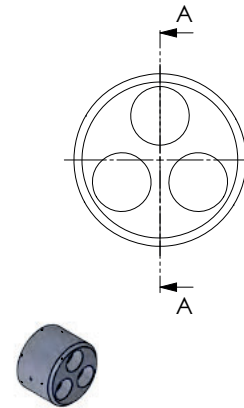

## Accessories



Spike



Bracket

## Certifications



# MaxiPUNCH 302



MaxiLED Lighting

Unit 2, Farrington Place, Rossendale Road Ind. Est. Burnley, Lancashire. UK. BB11 5TY  
T: +44 (0)1282 448086 E: [sales@maxiledlighting.com](mailto:sales@maxiledlighting.com) Web: [www.maxiledlighting.com](http://www.maxiledlighting.com)