

# MISSION

High-Efficiency In-Track Driver LED Tracklight  
Up to 140lm/W Luminous Efficiency  
98% German Alanod Reflector  
For Energy and Cost Savings




# MISSION – In-track Driver LED Tracklight

Project: Application reference




# MISSION S – In-track Driver LED Tracklight

New

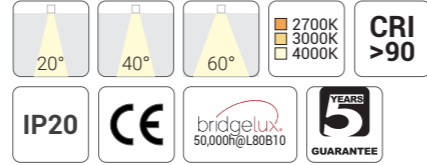


## Quick Info


- In-Track LED driver for simplified design
- High efficiency lighting solution
- Bridgelux LED: 17W, 28W; CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 40°, 60°
- Lumen Output: Up to 4100lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim



## Light Distribution

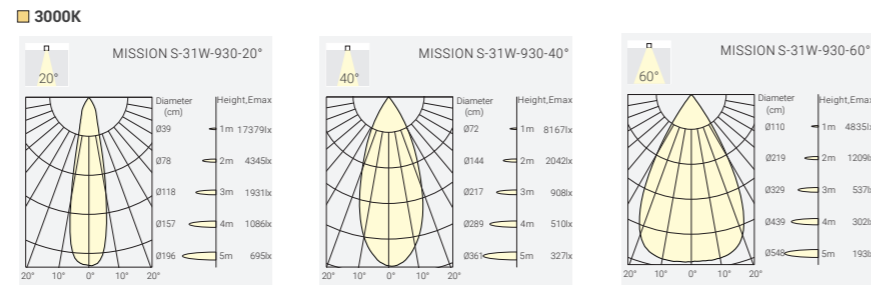

## Finish




## Order Info (MISSION S in Black Housing & Black Ring as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code						
17W	19W	34V	500mA	90	2700K	20°	2800lm	2400lm	MIS1-9272019F-BB						
						40°	2800lm	2400lm	MIS1-9274019F-BB						
						60°	2800lm	2400lm	MIS1-9276019F-BB						
						3000K	20°	2900lm	2500lm	MIS1-9302019F-BB					
							40°	2900lm	2500lm	MIS1-9304019F-BB					
							60°	2900lm	2500lm	MIS1-9306019F-BB					
						4000K	20°	3000lm	2600lm	MIS1-9402019F-BB					
							40°	3000lm	2600lm	MIS1-9404019F-BB					
							60°	3000lm	2600lm	MIS1-9406019F-BB					
						28W	31W	35V	800mA	90	2700K	20°	4400lm	3800lm	MIS2-9272031F-BB
												40°	4400lm	3800lm	MIS2-9274031F-BB
												60°	4400lm	3800lm	MIS2-9276031F-BB
3000K	20°	4500lm	4000lm	MIS2-9302031F-BB											
	40°	4500lm	4000lm	MIS2-9304031F-BB											
	60°	4500lm	4000lm	MIS2-9306031F-BB											
4000K	20°	4600lm	4100lm	MIS2-9402031F-BB											
	40°	4600lm	4100lm	MIS2-9404031F-BB											
	60°	4600lm	4100lm	MIS2-9406031F-BB											

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

## Track System



3-Circuits

## Coding

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Ring Color	Accessory
<b>MIS1</b>	<b>927</b>	<b>20</b>	<b>19</b>	<b>F</b>	<b>W</b>	<b>W</b>	
MISSION S-19W	CR190/ 2700K	20°	19W	On-Off	White	White	
<b>MIS2</b>	<b>930</b>	<b>40</b>	<b>31</b>	<b>D</b>	<b>B</b>	<b>B</b>	
MISSION S-31W	CR190/ 3000K	40°	31W	DALI Dim	Black	Black	
	<b>940</b>	<b>60</b>					
	CR190/ 3000K	60°					



Project: Application reference