



# tokyo.

Tokyo is our most technical and versatile spotlight, designed for full lighting control. Its adjustable zoom (15°-55°), CCT Switch (2700K / 3000K / 4000K), and dimming function let you sculpt the light as needed. For retail or exhibitions, Tokyo offers precision, elegance and adaptability.

Alzqueta Gallery, Barcelona, Spain . Photography Javier Márquez Studio



track lights

panels & industrial

table

ceiling

wall

floor

# tokyo.

zoom-dim

Tokyo is our most technical and versatile spotlight, designed for full lighting control. Its adjustable zoom (15°-55°), CCT Switch (2700K / 3000K / 4000K), and dimming function let you sculpt the light as needed. For retail or exhibitions, Tokyo offers precision, elegance and adaptability.



	W	K (3CCT)	Real lm (2K7-3K-4K)	▲	V
<b>tokyo 15</b>					
● 1.5005.2118	15	2K7-3K-4K	955-985-1060 (15°) 1080-1115-1200 (55°)	15°-55°	220-240
● 1.5005.2218	15	2K7-3K-4K	955-985-1060 (15°) 1080-1115-1200 (55°)	15°-55°	220-240
<b>tokyo 25</b>					
● 1.5006.2118	25	2K7-3K-4K	1800-1860-2000 (15°) 1955-2025-2175 (55°)	15°-55°	220-240
● 1.5006.2218	25	2K7-3K-4K	1800-1860-2000 (15°) 1955-2025-2175 (55°)	15°-55°	220-240

Compatible con carril trifásico.  
Compatible with three-phase rail.  
Compatible avec rail triphasé.

	W	K (3CCT)	Real lm (2K7-3K-4K)	▲	V
<b>tokyo 15 dali</b>					
● 1.5005.3118	15	2K7-3K-4K	955-985-1060 (15°) 1080-1115-1200 (55°)	15°-55°	220-240
● 1.5005.3218	15	2K7-3K-4K	955-985-1060 (15°) 1080-1115-1200 (55°)	15°-55°	220-240
<b>tokyo 30 dali</b>					
● 1.5006.3118	30	2K7-3K-4K	1800-1860-2000 (15°) 1955-2025-2175 (55°)	15°-55°	220-240
● 1.5006.3218	30	2K7-3K-4K	1800-1860-2000 (15°) 1955-2025-2175 (55°)	15°-55°	220-240

Compatible con carril dali.  
Compatible with Dali track.  
Compatible avec rail triphasé.

## ACCESSORIES

- 1.5005.8001 Honeycomb tokyo 15 & tokyo dali 1



On-Off



Dali



track lights

panels & industrial

table

ceiling

wall

floor




CCT switch and dimming




Zoom


tokyo 15




tokyo 15 dali



tokyo 25



tokyo 25 dali



**TOKYO 15**

ZOOM - SWITCH - DIM



**SPECIFICATIONS**

Version	TOKYO 15
Input voltage	100-240V
Control	Dimming
LED type	LED COB
Power (W)	15
Real lumen	2700K: 955-1080, 3000K: 985-1115, 4000K: 1060-1200
Color temperature	2K7-3K-4K
CRI	CRI >90
Beam angle	15°-55°
Finishes	White
Measures (mm)	70x160
Weight (Kg)	0.70
Body	Aluminium
IP	IP20
Temperature range	-20°C +40°C
Warranty	5-years




**ACCESSORIES**



Honeycomb  
Ref. 1.5005.8001

Surface mounted base  
Ref. 1.5000.8101

Surface mounted base  
Ref. 1.5000.8201

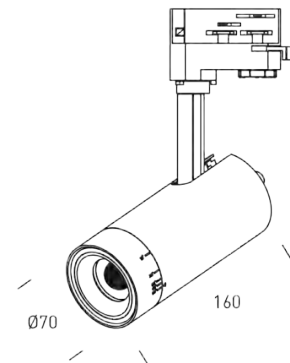

**DETAILS**



Potentiometer

Adjustable temperature switch

Adjustable beam angle


**TOKYO 15**

ZOOM - SWITCH - DIM



**SPECIFICATIONS**

Version	TOKYO 15
Input voltage	100-240V
Control	Dimming
LED type	LED COB
Power (W)	15
Real lumen	2700K: 955-1080, 3000K: 985-1115, 4000K: 1060-1200
Color temperature	2K7-3K-4K
CRI	CRI >90
Beam angle	15°-55°
Finishes	Black
Measures (mm)	70x160
Weight (Kg)	0.70
Body	Aluminium
IP	IP20
Temperature range	-20°C +40°C
Warranty	5-years

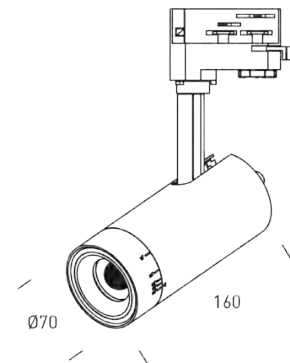

**ACCESSORIES**



Honeycomb  
Ref. 1.5005.8001

Surface mounted base  
Ref. 1.5000.8101

Surface mounted base  
Ref. 1.5000.8201

**DETAILS**



Potentiometer

Adjustable temperature switch

Adjustable beam angle


**TOKYO 25**

ZOOM - SWITCH - DIM



**SPECIFICATIONS**

Version	TOKYO 25
Input voltage	100-240V
Control	Dimming
LED type	LED COB
Power (W)	25
Real lumen	2700K: 1800-1955, 3000K: 1860-2025, 4000K: 2000-2175
Color temperature	2K7-3K-4K
CRI	CRI >90
Beam angle	15°-55°
Finishes	White
Measures (mm)	85x165
Weight (Kg)	1
Body	Aluminium
IP	IP20
Temperature range	-20°C +40°C
Warranty	5-years

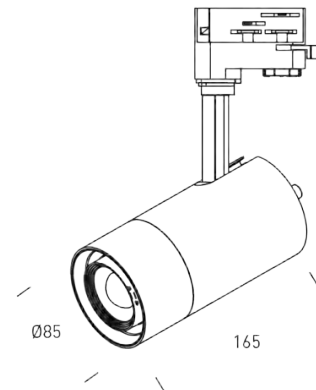

**ACCESSORIES**



Surface mounted base  
Ref. 1.5000.8101



Surface mounted base  
Ref. 1.5000.8201


**DETAILS**



Potentiometer



Adjustable temperature switch



Adjustable beam angle


**TOKYO 25**

ZOOM - SWITCH - DIM



**SPECIFICATIONS**

Version	TOKYO 25
Input voltage	100-240V
Control	Dimming
LED type	LED COB
Power (W)	25
Real lumen	2700K: 1800-1955, 3000K: 1860-2025, 4000K: 2000-2175
Color temperature	2K7-3K-4K
CRI	CRI >90
Beam angle	15°-55°
Finishes	Black
Measures (mm)	85x165
Weight (Kg)	1
Body	Aluminium
IP	IP20
Temperature range	-20°C +40°C
Warranty	5-years

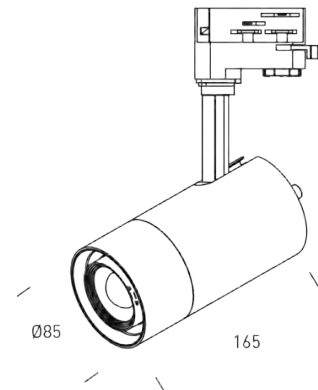

**ACCESSORIES**



Surface mounted base  
Ref. 1.5000.8101



Surface mounted base  
Ref. 1.5000.8201


**DETAILS**



Potentiometer



Adjustable temperature switch



Adjustable beam angle