SPACE 60 EVO Ring Acoustic -1 – Pendant Direct Linear System

95° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE

Quick Info

- General Lighting, Pendant Direct
- LED: 35W, 52W, 65W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓
- Lumen Output: Up to 18200lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim



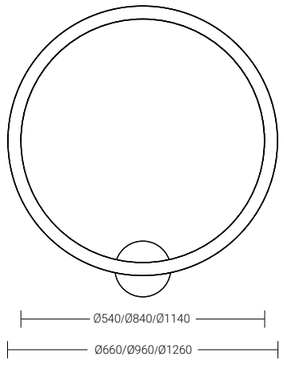

Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
35W	38W	33V	1050mA	D960mm	White	80	4000K	95° ↓	5030lm	SV60CLD096P-84095038F-WN-AC
52W	55W	33V	1500mA	D1260mm	White	80	4000K	95° ↓	7423lm	SV60CLD126P-84095055F-WN-AC
65W	70W	33V	2000mA	D1560mm	White	80	4000K	95° ↓	9315lm	SV60CLD156P-84095070F-WN-AC

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Acoustic colours

NKA-01 Papyrus white | NKA-03 Pearl dark grey | NKA-06 Honey yellow | NKA-08 Capn blue | NKA-11 Signal black

Luminaire colours

Coding

SV60CLD*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Acoustic
SV60CLD096P Pendant D960mm	830 CRI>80/ 4000K		038 38W	F On-Off	W White	N None	
SV60CLD126P Pendant D1260mm			055 55W	A 1-10V Dim	B Black		
SV60CLD15P6 Pendant D1560mm			070 70W	D DALI Dim			

SPACE 60 EVO Ring Acoustic -2 – Pendant Direct Linear System





95° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE

Quick Info

- General Lighting, Pendant Direct
- LED: 35W, 52W, 65W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓
- Lumen Output: Up to 18200lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
35W	38W	33V	1050mA	D960mm	White	80	4000K	95° ↓	5030lm	SV60CLD096P-84095038F-WN-AC
52W	55W	33V	1500mA	D1260mm	White	80	4000K	95° ↓	7423lm	SV60CLD126P-84095055F-WN-AC
65W	70W	33V	2000mA	D1560mm	White	80	4000K	95° ↓	9315lm	SV60CLD156P-84095070F-WN-AC

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Acoustic colours

NKA-01 Papyrus white | NKA-03 Pearl dark grey | NKA-06 Honey yellow | NKA-08 Capn blue | NKA-11 Signal black

Luminaire colours

Coding

SV60CLD*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Acoustic
SV60CLD096P Pendant D960mm	830 CRI>80/ 4000K		038 38W	F On-Off	W White	N None	
SV60CLD126P Pendant D1260mm			055 55W	A 1-10V Dim	B Black		
SV60CLD15P6 Pendant D1560mm			070 70W	D DALI Dim			