SPACE 60 EVO Oval Acoustic – Pendant Direct Linear System

95° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE

Quick Info

- General Lighting, Pendant Direct
- LED: 56W, 66W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓
- Lumen Output: Up to 9400lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

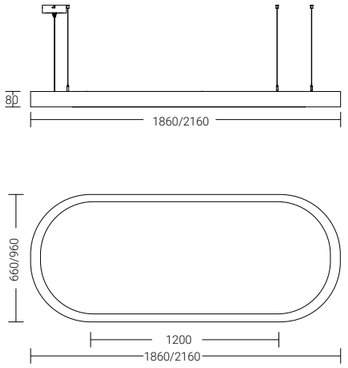

Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
56W	61W	33V	1700mA	660mm	White	80	4000K	95° ↓	7950lm	SV60CLR066P-84095061F-WN-AC
66W	72W	33V	2000mA	960mm	White	80	4000K	95° ↓	9400lm	SV60CLR096P-84095072F-WN-AC

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Acoustic colours

NKA-01 Papyrus white | NKA-03 Pearl dark grey | NKA-06 Honey yellow | NKA-08 Capn blue | NKA-11 Signal black

Luminaire colours

Coding

SV60CLR*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Acoustic
SV60CLR066P Pendant 660mm	830 CRI>80/ 3000K	95 95° ↓	061 61W	F On-Off	W White	N None	
SV60CLR096P Pendant 960mm	840 CRI>80/ 4000K		072 72W	A 1-10V Dim	B Black		
				D DALI Dim			