


SPACE 60 EVO Line Acoustic -1 – Pendant Direct Linear System



Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 27W, 32W, 40W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80 ° ↓
- Lumen Output: Up to 4400lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

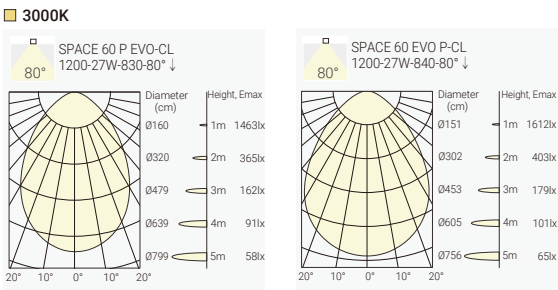

Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
24W	27W	28V	850mA	1196mm	White	80	4000K	80° ↓	3000lm	SV60CL119P-8408027F-WN-AC
29W	32W	28V	1050mA	1476mm	White	80	4000K	80° ↓	3550lm	SV60CL147P-8408032F-WN-AC
36W	40W	28V	1300mA	1826mm	White	80	4000K	80° ↓	4400lm	SV60CL182P-8408040F-WN-AC

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Acoustic colours



Luminaire colours



Coding

SV60***	—***	**	***	*	—*	*	—*
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Acoustic
SV60CL119P Pendant 1196mm	830 CRI80/ 3000K	80 80° ↓	27 27W	F On-Off	W White	N None	
SV60CL147P Pendant 1476mm	840 CRI80/ 4000K		32 32W	A 1-10V Dim	B Black		
SV60CL182P Pendant 1826mm	930 CRI90/ 3000K		40 40W	D DALI Dim			
	940 CRI90/ 4000K						




SPACE 60 EVO Line Acoustic -2 – Pendant Direct Linear System



Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 27W, 32W, 40W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80 ° ↓
- Lumen Output: Up to 4400lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

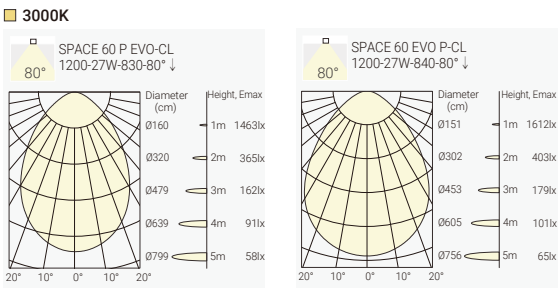


Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
24W	27W	28V	850mA	1196mm	White	80	4000K	80° ↓	3000lm ↓	SV60CL119P-8408027F-WN-AC2
29W	32W	28V	1050mA	1476mm	White	80	4000K	80° ↓	3550lm ↓	SV60CL147P-8408032F-WN-AC2
36W	40W	28V	1300mA	1826mm	White	80	4000K	80° ↓	4400lm ↓	SV60CL182P-8408040F-WN-AC2

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Acoustic
SV60CL119P Pendant 1196mm	830 CRI80/ 3000K	80 80° ↓	27 27W	F On-Off	W White	N None	
SV60CL147P Pendant 1476mm	840 CRI80/ 4000K		32 32W	A 1-10V Dim	B Black		
SV60CL182P Pendant 1826mm	930 CRI90/ 3000K		40 40W	D DALI Dim			
	940 CRI90/ 4000K						

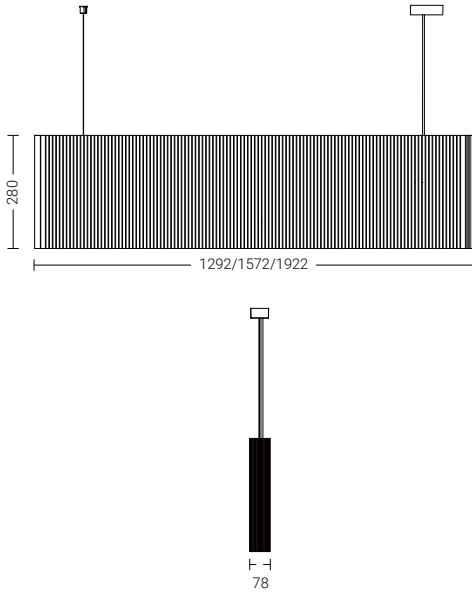

Acoustic colours



Luminaire colours




SPACE 60 EVO Line Acoustic - 3 – Pendant Direct Linear System



Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 27W, 32W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4400lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

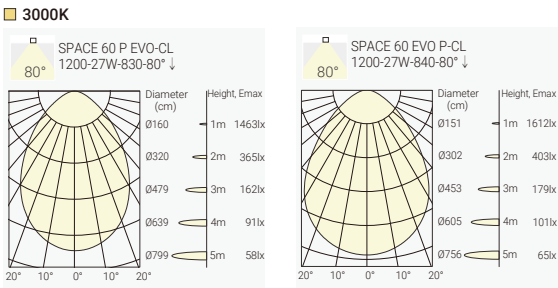

Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
24W	27W	28V	850mA	1196mm	White	80	4000K	80° ↓	3000lm ↓	SV60CL119P-8408027F-WN-AC3
29W	32W	28V	1050mA	1476mm	White	80	4000K	80° ↓	3550lm ↓	SV60CL147P-8408032F-WN-AC3

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Acoustic colours



Luminaire colours



Coding

SV60***	—***	**	***	*	—*	*	—*
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Acoustic
SV60CL119P Pendant 1196mm	830 CRI80/ 3000K	80 80° ↓	27 27W	F On-Off	W White	N None	
SV60CL147P Pendant 1476mm	840 CRI80/ 4000K		32 32W	A 1-10V Dim	B Black		
SV60CL182P Pendant 1826mm	930 CRI90/ 3000K		40 40W	D DALI Dim			
	940 CRI90/ 4000K						

